

- INSTRUCTIONS**
- Original and/or subsequent record used to evaluate the corner position.
 - Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 - Description of monument and accessories set to perpetuate the corner position.
 - Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography etc., position of accessories, etc.
 - Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 - Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 S6 S5

T. 35N

R. 26W

P.M.M.

Lincoln

County

RECORD: Original G.L.O. survey - 1894

B.L.M. Remonumentation:

At the corner point, set an iron post, 30" long, $2\frac{1}{2}$ " diam., 24" in the ground, in concrete, with brass mkd.,



From which:

A fir-stump, 36" diam., bears N. $29\frac{1}{4}$ E. 11 lks. dist., mkd. BT. (Record)
A fir, 26" diam., bears S. $2\frac{1}{2}$ W. 50 lks. dist., visible mks. 1/4 S. (Record: S.88 W., 50 lks.)

The new bearing tree:

A fir, 6" diam., bears N. 43° E. 23 lks. dist., mkd. 1/4 S5 BT.


Bury the original stone alongside and raise a mound of stone, 3' base 2' high, W. of the iron post.

FOUND: A $3\frac{1}{2}$ " diam. B.L.M. brass cap approx. 5" above grnd., mkd. as shown, adjacent to mnd. of stone.

From which:

A stump 24" diam., bears N 24° E. 6.4' dist., with BT sign.
A spruce, 8" diam., bears N. 40° E. 16.0' dist., healed face.
A fir, 28" diam., bears N. 89° W. 32.9' dist., healed face. (GLO RECORD S88°W)

(NOTE: B.L.M. has bearing of S. $2\frac{1}{2}$ W., this bearing was double checked in the field and found to be N. 89° W.)

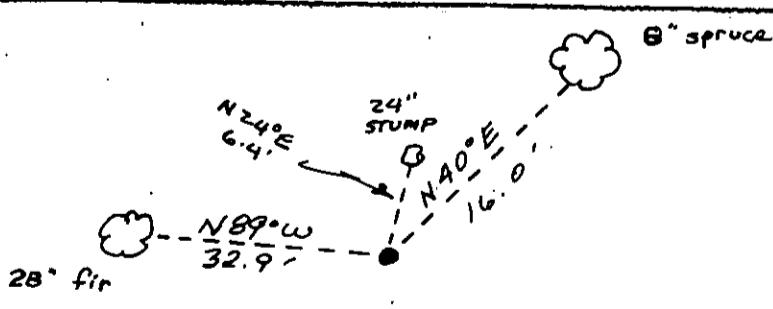

SKETCH OF CORNER

CERTIFICATION

I, James W. Reed,
certify the information above herein is true and correct.

James W. Reed
Signature Ground Party Chief
Thomas C. Hill

I, Thomas C. Hill,
certify that this Corner Record correctly represents work performed
by me or under my direction in compliance with the "Corner
Recordation Act" (D.C. 10, et seq., M.D.A.)

Thomas C. Hill
Signature of Surveyor & Seal
Date: 3/15/83 Reg. No. 5612 S

Employer: U.S.F.S.

Office of Clerk and Recorder, County of Lincoln. This "corner
record" was filed for record on the June 16th day of 1983
was noted on the cross-index plat and is assigned page No. 2244, in
book No. Janet B. Siegel by Betty L. Conces
County Official deputy

Sec. 6

