

**CERTIFIED LAND CORNER RECORDATION**

(REFERENCE FSH 5681.65)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)  
 CORNER COMMON TO SECTION 15, 16, 21 & 22, T.35N., R.26W., P.M.M.  
 LINCOLN, COUNTY, MONTANA


FOUND 1" HEX IRON PIN WITH STONE 6"x10" SET IN GROUND AND BEARING TREES.  
 RECORD-A QUARTZITE STONE 14"x8"x6" , 10" IN THE GROUND FOR CORNER SECTION  
 15, 16, 21, & 22, MARKED 3 NOTCHES ON S & E FACE FROM WHICH;  
 A PINE 18" DIAM., BEARS N.37° E., 87 LINKS DISTANCE, MARKED T.35N., R.26W.,  
 S.15 BT.  
 A PINE, 12" DIAM., BEARS S.55-45 E., 70 LINKS DISTANCE MARKED T.35N.,  
 R.26W., S.22 BT.  
 A FIR, 18" DIAM., BEARS S.38-30 W., 8 LINKS DISTANCE, MARKED T.35N.,  
 R.26W. S.21 BT.  
 A LARCH, 16" DIAM., BEARS N.30° W., 25 LINKS DISTANCE, MARKED T. 35N.,  
 R.26W., S. 16 BT.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED  
 TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: SEPT. 5, 1973

THE MONUMENT AND BEARING TREES WERE NOT CHANGED

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.  
 (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

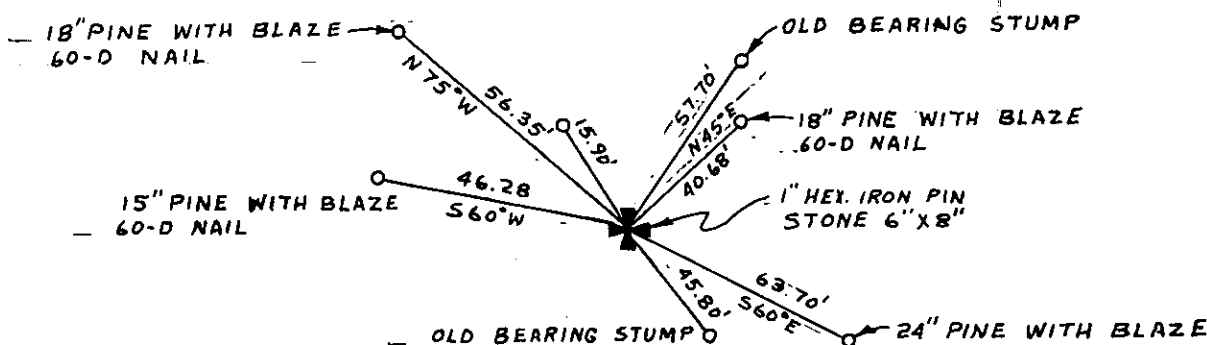

Surveyor's Seal


I, ROBERT E. HAHN  
 certify that the information shown herein is true and  
 correct.

*Robert E. Hahn*  
 Signature of Ground Party Chief

I, JAMES L. HAHN  
 certify that I have carefully performed or reviewed the  
 work done on the diagrammed corner as reported on this  
 recordation form and approve the same.

*James L. Hahn*  
 Signature of Surveyor

DIAGRAM OF CORNER:



T 35N R 26W

✕ = Corner recorded on the sheet

2795 S  
 Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 7th day of August 1974, was noted on the cross-index plat and is

assigned page No. 369, in book No. 1 *Elmer L. Vaughn, Macclatton, Deputy*  
 County Official

Cross Index No. N 13 T. 35 R. 26 Mer.

24

