

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

1/4 CORNER COMMON TO SECTION 10 & 11, T.35N., R.26W., P.M.M.
LINCOLN COUNTY, MONTANA


FOUND BRASS CAP SET IN CONCRETE WITH BEARING TREES.
RECORD-SET IRON POST, 30" LONG, 2 1/2" DIAM., 26" IN THE GROUND, IN CONCRETE WITH BRASS CAP MARKED, 1/4 S.10, S.11, T.35N., R.26W. FROM WHICH THE REMAINS OF THE ORIGINAL BEARING TREES.
A FIR, STUMP, 10" DIAM., BEARS S.16 1/2° E., 40 LINKS DISTANCE, VISIBLE MARKS S. BT. (RECORD)
THE NEW BEARING TREES;
A FIR, 7" DIAM., BEARS S.11 3/4° E., 52 LINKS DISTANCE MARKED 1/4 S.11 BT
A FIR, 7" DIAM., BEARS S.54 1/4 W. 14 LINKS DISTANCE, MARKED 1/4 S.10 BT
BURY STONE ALONGSIDE.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: SEPT. 12, 1973

THE MONUMENT AND BEARING TREES WERE NOT CHANGED.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

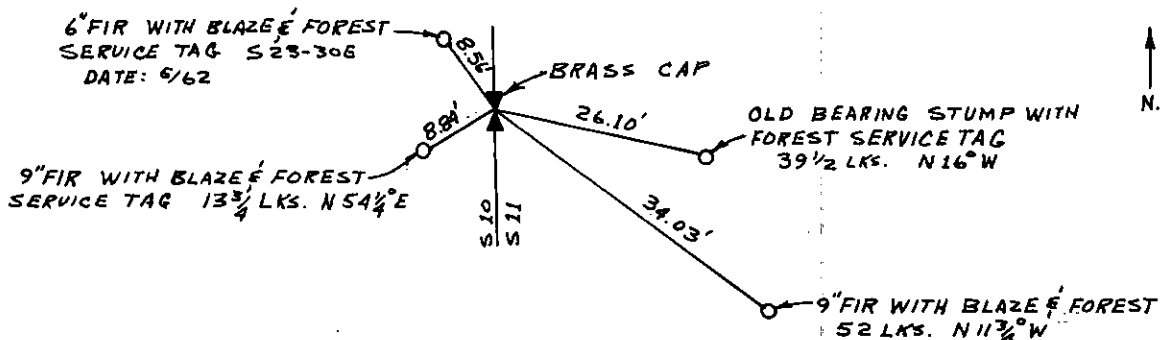

Surveyor's Seal


I, ROBERT E. HAHN
certify that the information shown herein is true and correct.

Robert E. Hahn
Signature of Ground Party Chief

I, JAMES L. HAHN
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

James L. Hahn
Signature of Surveyor

DIAGRAM OF CORNER:



—X— = Corner recorded on the sheet

2795 S
Registration Number

Office of Clerk and Recorder, County of Lincoln
This "corner record" was filed for record on the 7th day of August 1974, was noted on the cross-index plat and is assigned page No. 378, in book No. Edmund L. Vaughn, Mae Watson, Deputy
County Official

