CERTIFIED CORNER RECORDATION

Corner	NE 1/16	Sec.	10	T.	35N	R.	26W	P.M., MT	Lincoln	County

I. 1983 Certified Corner Recordation by Thomas C. Hill, Reg. No. 5612 S: On record at the Lincoln County Clerk and Recorder's office, on page no. 3047, filed on April 25, 1985.

At the corner position, corresponding to C. of S. 1230 and this survey, set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with an aluminum cap mkd. as shown:



Established two bearing trees:

A aspen, 8 ins. diam., bears S63°E, 7.8 ft. dist., scribed "1/16 BT". A pine, 8 ins. diam., bears S2°W, 7.7 ft. dist., mkd. "1/16 BT".

II. Found a 3 1/4 in. diam. alum. cap, firmly set, flush with the ground, and mkd. as shown above.

From which:


A aspen, 8 ins. diam., bears S63°E, 7.8 ft. dist., with no visible scribe. A dead pine, 7 ins. diam., bears S2°W, 7.7 ft. dist., scribed "1/16 BT".

III. Established one new bearing tree:

A pine, 12 ins. diam., bears S4°E, 61.8 ft. dist., scribed "NE 1/16 S10 BT".

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

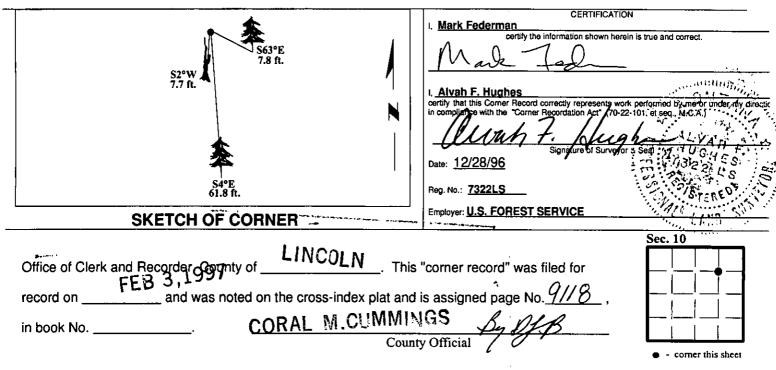

26W

