
## **CERTIFIED CORNER RECORDATION**

Corner	Sec. Cor.	Sec.	18&19	T.	35N	R.	26 &	P.M., MT	Lincoln	County
			13 &24				27W			•

I. <u>1894 G.L.O. original record surveyed by Abram L. Jaqueth:</u> Set a stone and four bearing trees.

1959 B.L.M. Remonumentation by David R. Cunningham: The corner of secs. 13, 18, 19, & 24, monumented with a limestone, 14x8x6 ins., set and marked as described in the official record and witnessed by the remains of the four original bearing trees. At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, in concrete, with brass cap marked:



Establish one new bearing tree in sec. 19.

Bury the original stone alongside, and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the iron post.

II. Found a 30 in. x 2 1/2 in. iron post, firmly set, protruding 4 ins. above the ground, with a 3 1/4 in. diam. B.L.M. brass cap mkd. as shown above.

From which:

A fir, 19 ins. diam., bears N31°E, 28.3 ft. (43 lks.) dist., mkd. with visible scribe. (G.L.O. record-N26°30'E, 42 lks.)


A fir, 10 ins. diam., bears S51°E, 30.6 ft. (47 lks.) dist., mkd. with a healed face. (B.L.M. record-S54 3/4°E)

A stump, 20 ins. diam., bears S72°E, 16.6 ft. (25 lks.) dist., mkd. with visible scribe. (G.L.O. record-26 lks.)

A fir, 20 ins. diam., bears S52°W, 35.2 ft. (53 lks.) dist., mkd. with visible scribe. (G.L.O.-rec.) A fir, 19 ins. diam., bears N27°W, 19.7 ft. (30 lks.) dist., mkd. with visible scribe. (G.L.O.-rec.)

III. Replaced BT signs, attached LSM signs, and repainted scribe and red bands around BT's.

Magnetic Declination: 20° East.

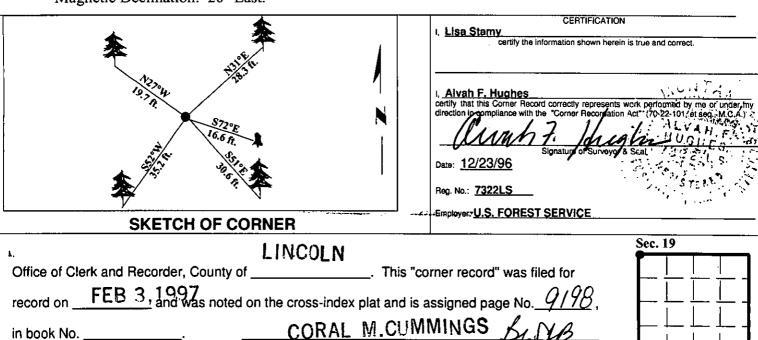

County Official

- corner this sheet

