


Corner	Sec. Cor.	Sec.	7&18 12 & 13	T. 35N	R. 26 & 27W	P.M., MT	Lincoln	County
--------	-----------	------	-----------------	--------	----------------	----------	---------	--------


- 1959 B.L.M. Remonumentation record by David R. Cunningham: The cor. of secs. 7, 12, 13, & 18, monumented with a limestone, 20x10x6 ins., set and marked as described in the official record and witnessed by the remains of two of the four original bearing trees. At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, in concrete, with brass cap marked:

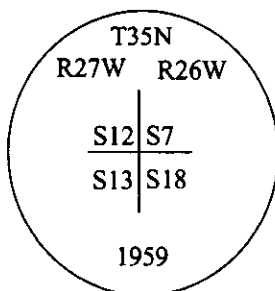

Bury the original stone alongside, and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the iron post.

- II. Found a 2 1/2 in. diam. iron post, firmly set, protruding 2 ins. above the ground, with a 3 1/4 in. diam. B.L.M. brass cap, mkd. as shown above. (Found orig. stone, 6x8 ins., 7 ins. above ground, firmly set, alongside BC, with 4 notches on the S. edge). From which:
- A fir, 15 ins. diam., bears N6°E, 69.5 ft. (105 lks.) dist., mkd. with a healed face. (B.L.M. record- 104 lks.)
  - A fallen stump, 6 ins. diam., bears N25°E, 11.9 ft. (18 lks.) dist., mkd. with visible scribe. (G.L.O. record- 14 lks.)
  - A stump, 23 ins. diam., bears S21°E, 25.7 ft. (39 lks.) dist., with a chopped face. (G.L.O. record- S17°E)
  - A fir, 9 ins. diam., bears S62°E, 48.9 ft. (74 lks.) dist., mkd. with a healed face. (B.L.M.-rec.)
  - A fir, 18 ins. diam., bears S14°W, 44.5 ft. (67 lks.) dist., mkd. with a healed face. (B.L.M. record- 68 lks.)
  - A fir, 31 ins. diam., bears S54°W, 48.2 ft. (73 lks.) dist., mkd. with a healed face. (G.L.O. record- S58°W)
  - A fir, 14 ins. diam., bears N12°W, 50.8 ft. (77 lks.) dist., mkd. with a healed face. (B.L.M.-rec.)
  - A downed rotten log, bears N8°W, 13.2 ft. (20 lks) dist., with no visible scribe. (G.L.O. record- 18 lks.)
  - A mound of stone, 3 ft. diam., West, 1.0 ft

- III. Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.  
Magnetic Declination: 20° East.

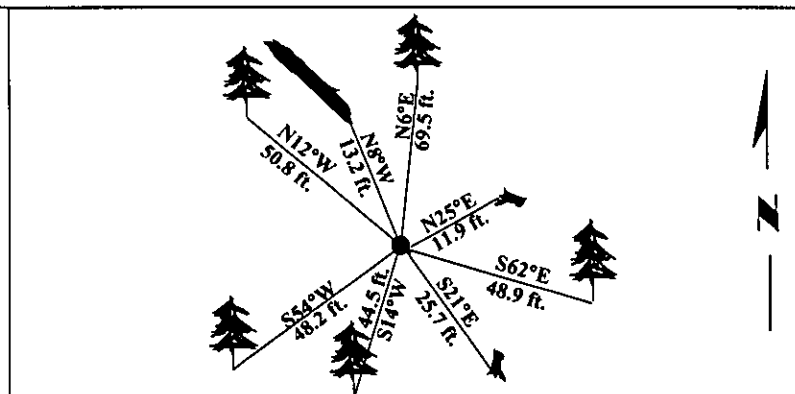

CERTIFICATION

I, Mark Federman  
certify the information shown herein is true and correct.

Mark Federman

I, Alvah F. Hughes  
certify that this Corner Record correctly represents work performed by me or under my  
direction in compliance with the "Corner Reclamation Act" (70-22-101, et seq., M.C.A.).

Alvah F. Hughes  
Signature of Surveyor & Seal

Date: 12/23/96

Reg. No.: 7322LS

Employer: U.S. FOREST SERVICE

County Official

## Sec. 18

● - corner this sheet

