## CERTIFIED CORNER RECORDATION

T 36 N. R. 26 W. P.M.M. LINCOLN County CS 1/16 S28

- Record: No previous record.
- II. Found: No evidence found.

Perpetuation: At the calculated position, determined by a section subdivision survey, set a 5/8 in. diam. rebar, 24 ins. long, 22 ins. in the ground with a 3 1/4 in. diam. standard U.S.D.A alum. cap mkd. as shown below, from which:


A fir, 10 ins. diam., bears N90°E., 14.50 ft dist., mkd. CS 1/16 S28 BT. A fir, 16 ins. diam., bears N.56 W., 29.00 ft. dist., mkd. CS 1/16 S28 BT.

Painted faces and 6 in. wide red bands to all bearing trees and attached Land Survey Monument and Bearing Tree signs.


Set a steel post with attached property boundary sticker 3 ft. N. on line.

Magnetic declination: 20° East

Equipment used: Hand compass and loggers tape



Kootenai Surveyors Inc., 314 California Av., Libby, MT. 59923 (406) 293-4354

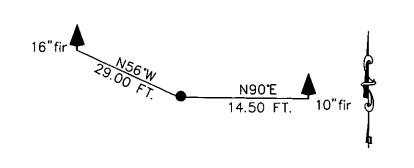

CERTIFICATION

ı. Doug Schuhknecht certify the information shown here

herein is true and correct.

Signature Ground Party Chief Alvah F. Hughes 06/21/2004 Reg. No. 7322-L Employer: Kootenai Surveyors Inc.

Sec.28

SKETCH OF CORNER

180688 BOOK: CCR CCER'S PAGE: 10697 Pages: 1 Offic corner STATE OF MONTANA LINCOLN COUNTY RECORDED: 11/16/2004 12:50 KOI: CCER'S CORAL M. CUMMINGS CLERK AND RECORDER FEE: \$0.00 was TO: FILED , book ... 10691

· corner this sheet

Cross Index No. U 11 T. 36N. R. 26W. P.M., MT Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors