

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Meander Cor. East Shore Glenlake T. 36N R. 26W P.M.M. Lincoln County
between Sections 22 & 27


Record:

Set a post 4' long 4" sq. 24" in the ground marked
MC on west face & T 36N on E, R 26W S 22 on N, &
S 27 on S faces from which:

a tamarack 22" diam. bears N. 25° W. 251 KS
a tamarack 26" diam. bears S. 40° E 71 KS

Found scribed post and SE BT stump. with scribing.
Set aluminum cap.

See C. of S. No. 915 for adjacent corners

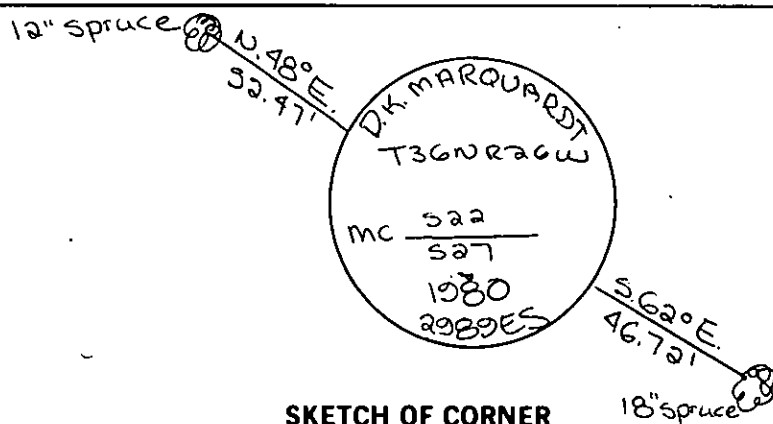

SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, D.K. Marquardt
certify that this Corner Record correctly represents work performed
by me or under my direction in compliance with the "Corner
Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 7-13-81 Reg. No. 2289ES


Employer: _____

Office of Clerk and Recorder, County of Lincoln. This "corner
record" was filed for record on the July 17th day of 1981,
was noted on the cross-index plat and is assigned page No. 1100, in
book No. 1

Thomas L. Vaughn, by Betty Bell,
County Official Deputy

Cross Index No. R-15-16 T. 36N R. 26W P.M.M.

Sec. 22



• - corner this sheet