

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

-CERTIFIED CORNER RECORDATION

Corner 1/4 cor. between Sec. 22 & 23 T. 36N R. 26W P.M.M. Lincoln County


Record:

Set a sandstone 18x8x6 ins. 12 ins. in the ground marked 1/4 on west face from which:
 a fir 14" diam. bears S. 89° E. 14 lks.
 an alder 4" diam bears S. 74° W. 26 lks.

Set aluminum cap by single proportion.

Found stone loose 1.5' North of alum. cap.
 Buried alongside.

See C. of S. No. 915 for adjacent corners

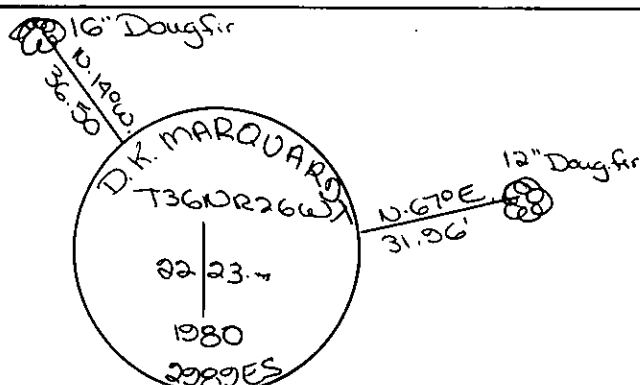

SKETCH OF CORNER

CERTIFICATION

I, _____
 certify the information shown herein is true and correct.

Signature Ground Party Chief

D.K. Marquardt

I, _____
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

D.K. Marquardt
 Signature of Surveyor & Seal

Date: 7-13-81 Reg. No. 2989ES


Employer: _____

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the July 17th day of 1981, was noted on the cross-index plat and is assigned page No. 1102, in book No. 1

Thomas L. Vaughan, Jr. Deputy
 County Official

Cross Index No. P-17 T. 36N R. 26W P.M.M.

Sec. 22



• - corner this sheet