

- INSTRUCTIONS**
1. Original and/or subsequent record used to evaluate the corner position.
  2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
  3. Description of monument and accessories apt to perpetuate the corner position.
  4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, triangulation line, position of accessories, etc.
  5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
  6. Fill in Cross Index & Section Diagram at bottom of sheet.

27 | 26

## CERTIFIED CORNER RECORDATION

34 | 35


T. 36 N. R. 26 W. P.M.M. Lincoln

County

**Corner** RECORD: Original G.L.O. survey 1893.

B.L.M. remonumentation notes.

At the corner point set an iron post, 30" long, 2½" diam., 28" in the ground, in concrete, with brass cap mkd.



From which:

The remains of the orginal bearing trees:

- A stump, 16" diam., bears N.33E., 75 lks. dist. (Record)
- A dead fir, 14" diam., bears S.45E., 14 lks. dist., visible mks. T36N R26W S35 BT. (Record)
- A stump, 16" diam., bears S.73W., 19 lks. dist., visible mks. BT. (Record)
- A stump, 16" diam., bears N.10W., 68 lks. dist., visible mks. BT. (Record)

The new bearing trees:



- A fir, 6" diam., bears N.29½E., 51 lks. dist., mkd. T36N R26W S26 BT.
- A fir, 11" diam., bears S.54½E., 85 lks. dist., mkd. T36N R26W S35 BT.
- A fir, 7" diam., bears S.46W., 11 lks. dist., mkd. T36N R26W S34 BT.
- A fir, 10" diam., bears N.74½W., 39 lks. dist., mkd. T36N R26W S27 BT.

Bury the orginal stone alongside and raise a mound of stone, 3' base, 2' high, W. of the iron post.

FOUND: A 3½" B.L.M. brass cap approx. ½" above the ground, set in a mound of stone and mkd. as shown.

From which:

- A fir, 17" diam., bears N.77W., 25.9' dist., healed face.
- A fir, 12" diam., bears N.30E., 33.6' dist., healed face.
- A fir snag, 13" diam., bears S.47E., 9.0' dist., scribing visible.
- A fir, 13" diam., bears S.51E., 56.4' dist., healed face.
- A fir, 12" diam., bears S.48W., 7.3' dist., healed face.

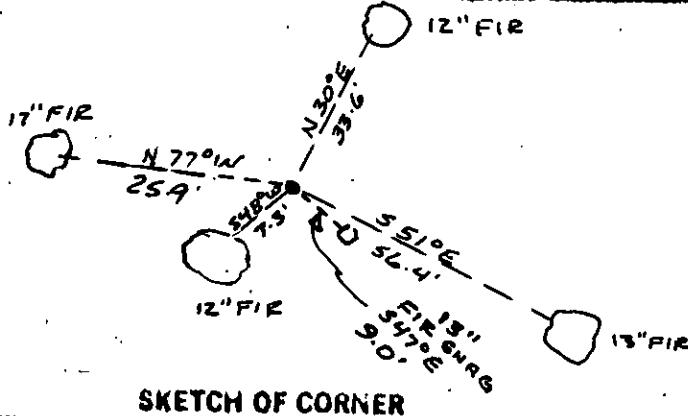

SKETCH OF CORNER

I, James W. Reed,  
certify the information above herein is true and correct.

James W. Reed  
Signature Ground Party Chief

I, Thomas C. Hill,  
certify that this Corner Record correctly represents work performed  
by me or under my direction in compliance with the "Survey  
Recording Act" (10-88-11), et seq., M.D.A.

Thomas C. Hill  
Signature of Surveyor & Seal

Date: 3/15/83 Reg. No. 5612 S

Employer: U.S.F.S.


Office of Clerk and Recorder, County of Lincoln. This "corner" record" was filed for record on the June 216 day of 1983.

was noted on the cross-index plat and is assigned page No. 2252, in book No. \_\_\_\_\_

Janet B. Siegel by Betty L. Conces  
County Official Deputy

Cross Index No. V-17 T. 36 R. 26 P.M.M.

Sec. 27



• corner this sheet