RI-7150-1

CERTIFIED LAND CORNER RECORDATION

(REFERENCE FSM 7153.53)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

Found section 4 bearing tree, an 8-inch lodgepole pine scribed "1/4 S4BT." Section 3 bearing tree is a rotting stump with scribed face. At record bearing and distance from the bearing trees, found wooden remains of post.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: JUNE, 1970

At record bearing and distance from the bearing trees, set a 2-inch-by-30-inch galvanized iron pipe 24 inches in the ground and marked the cap as shown at the right from which:

A 16-inch larch bears S. 66° E., 46.2 feet distant, and scribed "RM" with bearing tree sign attached.

Place bearing tree sign on section 4 bearing tree.

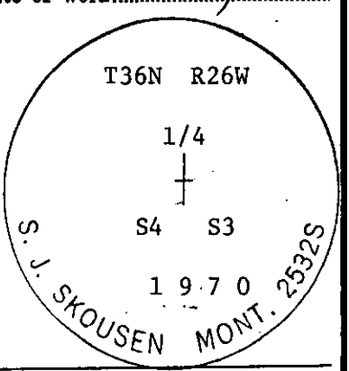

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

Surveyor's Seal

I, Stanley J. Skousen certify that the information shown herein is true and correct.

Stanley J. Skousen

Signature of Ground Party Chief

I, Stanley J. Skousen certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Stanley J. Skousen

Signature of Surveyor

2532 S

Registration Number

DIAGRAM OF CORNER:



♦ = Corner recorded on the sheet

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 16th day of December 19 71, was noted on the cross-index plat and is assigned page No. 245, in book No. 1

Eleanor L. Vaughn By: Mae Watson, Deputy

County Official

Cross Index No. C/3 T. 36 N., R. 26 W., P.M. Mer.

TOWNSHIP 36 NORTH, RANGE 26 WEST, OF THE PRINCIPAL MERIDIAN, MONTANA
RETRACEMENT AND PARTIAL SUBDIVISION OF SECTIONS 4 AND 10

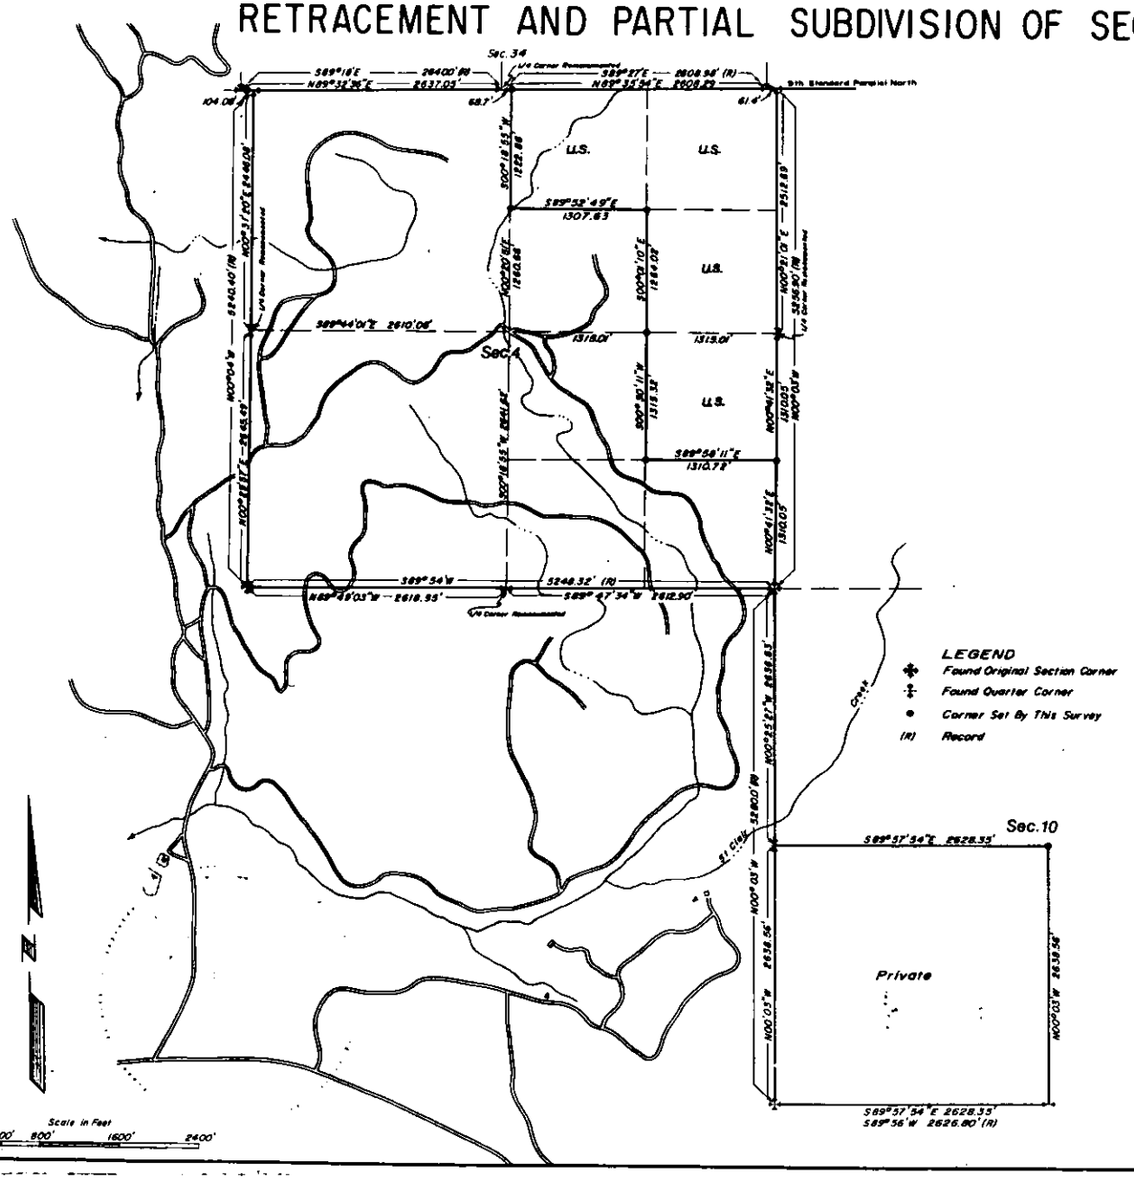

LEGEND
- Found Original Section Corner
- Found Quarter Corner
- Corner Set By This Survey
- (R) Record

NOTES:

This plat represents a partial subdivision of sections 4 and 10, T36N, R26W. Reference should be made to the G.L.O. notes and plats dated May 25, 1894 and December 1, 1909.

The C.1/4 section 10 was set at the intersection of the lines projected Parallel to the south and west boundaries of section 10.

This survey was done by photogrammetric methods in combination with conventional ground survey methods. The field notes, photography and computations are filed with the U.S.D.A., Forest Service, Division of Engineering, Missoula Montana.

The corner information on all corners set and remonumented is recorded on the recordation forms filed in the Lincoln County Court House, Libby, Montana.

All monuments set are 2"x 30" galvanized iron pipes with brass cap.

This survey was done at the request of the Fortine District Ranger, Kootenai National Forest.

The bearings are based on the record bearing between the S.W section corner and the West Quarter Corner of Section 10.

CERTIFICATE:

I hereby certify that I am a registered land surveyor in the State of Montana: that the survey shown on this plat has been correctly executed in accordance with the requirements of law: that the survey is true and complete as shown: that all monuments and marks set together with those found are of the type and occupy the position shown thereon, and are sufficient to enable the survey to be retraced.

Stanley J. Skousen
Montana Registration No. 2532S
May 27, 1971