# CERTIFIED CORNER RECORDATION

Corner ___E 1/16 of secs. 4 and 33___ T. __36 N.,__ R. __26 W.,__ P.M.M. __Lincoln__ County

I.   No previous record.

II. No evidence found.

III. At the calculated position, set a 3/4 in. diam., 30 ins. long, alum. rod 24 ins. in the ground with alum. cap mkd. as shown.
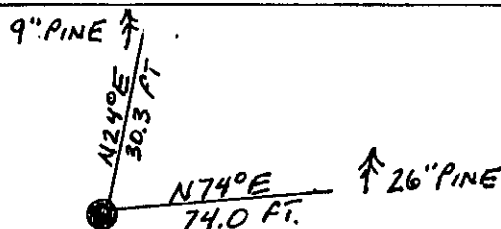
S33
E 1/16 ——
S4
9008LS
1992

From which

   A pine, 9 ins. diam., bears N24°E, 30.3 ft. dist., mkd. E 1/16 S33 BT.
   A pine, 26 ins. diam., bears N74°E, 74.0 ft. dist., mkd. E 1/16 S33 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.
Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, North, 3 ft.
Magnetic Declination: 20° East

SKETCH OF CORNER

9" PINE
N24°E 30.3 FT.
N74°E 74.0 FT.
26" PINE

CERTIFICATION

I, __Kevin A. Todd__ certify the information shown herein is true and correct.

Kevin A. Todd
Signature Ground Party Chief

I, __Ronald A. Pearson__ certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ronald A. Pearson
Signature of Surveyor & Seal

Date: __10/1/92__ Reg. No. __9008 LS__

Employer: __U.S. FOREST SERVICE__

Office of Clerk and Recorder, County of __Lincoln__. This "corner record" was filed for record on __12-7-92__ was noted on the cross-index plat and is assigned page No. __5/15__, in book No. _____

Coral M. Cummings
County Official

Cross Index No. __Z-12__ T. __36 N__ R. __26 W__ PMM

Sec. 33

● - corner this sheet