

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

This corner was not previously set

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of Work: 5/31/1996, 09/18/2002

In November 1995, I surveyed Section 19 for a Kootenai National Forest Cooperative Cadastral Survey named "Davis", task order 43-03J1-6-0037. This was a mark and posting line project between found corners. No Certificate of Survey was filed. A control worksheet is on file at the Kootenai National Forest, Supervisor Office in Libby. During this survey the North, East, South, West 1/4 corners, and the North 1/16 between 24/19 were traversed using a combination of Static GPS and conventional ground traverses. In May of 1996, the private landowner asked for additional surveying. The Center 1/4 was set from the 1995 control traverse. The private survey was then suspended until the fall of 2002. On September 18, 2002, I verified that the reference monument was properly set and is still monumented.

May 1995, I established the Center 1/4 corner on the straight line intersection of the opposing 1/4 corner. The Center 1/4 of Section 19 falls on a rock face. As a reference monument I set a 2-1/2" aluminum cap on a 5/8" x 24" rebar, 7" above the ground, on the North-South Mid-Section line, 80.00 feet Northerly of the true Center 1/4.

From the reference monument:

I attached a USFS Bearing Tree tag on a 6" fir which bears N.72°E., 16.3 feet (not scribed, private ownership). A North and East fence corner falls Northwesterly approximately 40 to 50 feet.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

From the true Center 1/4 of Section 19:

The reference monument bears N.04°17'55"E, 80.00 feet.

North 1/4, Section 19, is a 3-1/4" BLM brass cap (1969), bears N.04°17'55" E., 2644.01 feet.


East 1/4, Section 19, is a 3-1/4" BLM brass cap (1969), bears S.85°58'07"E., 2645.04 feet.

South 1/4, Section 19, is a 3-1/4" BLM brass cap (1968), bears S.04°17'55"W., 2632.11 feet.

West 1/4, Section 19, is a 3-1/4" BLM brass cap (1970), bears N.85°58'07"W., 2367.90 feet.

Bearings are referenced to the Montana Coordinate System, NAD 1983 (1992), determined by Static GPS observations. Distances noted are ground distance.

Surveyors Seal

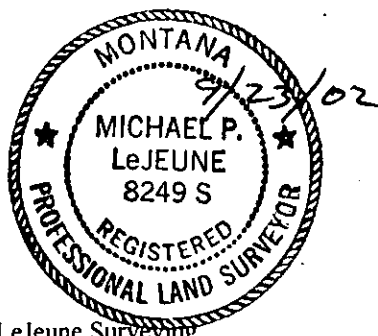

LeJeune Surveying
PO. Box 3692
Missoula, MT 59806

I, _____, certify that the information shown herein is true and correct.

Diagram of Corner:

Signature of Ground Party Chief

I, Michael P. LeJeune certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Michael P. LeJeune
Signature of Surveyor

Registration Number: 8249S

Center 1/4
Section 19
T. 36 N., R27 W.

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 25th day of Sept, 2002, was noted on the cross-index plat and is assigned page No. _____, in Book No. 10568.

By: *Coral M. Cummings* By *DB*

County Official

Cross Index No. P-3 T. 36 N., R. 27 W., P. M.