

## INSTRUCTIONS

1. Original and/or sub-record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing, lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## • CERTIFIED CORNER RECORDATION

Corner 1/4 corner between 8 & 9 T. 36N R. 27W P.M.M. Lincoln County

Record


Set a sandstone 18x6x4 ins. 12 ins in the ground  
from which:

a pine 10" diam. bears S. 89° E. 233 lks.

a pine 14" diam. bears N. 37° W. 82 lks.

Found stone is old pipe. Set aluminum cap.

See CofS. No 669 for adjacent corners.

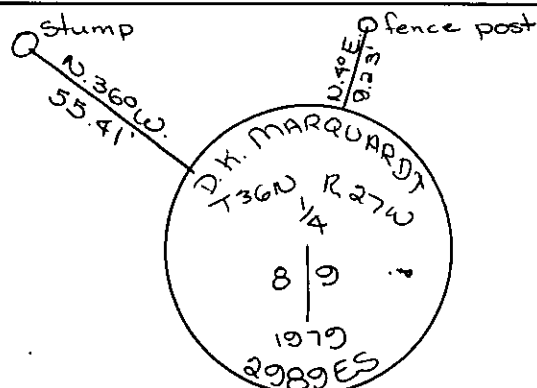

SKETCH OF CORNER

### CERTIFICATION

I, \_\_\_\_\_  
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, D.K. Marquardt

certify that this Corner Record correctly represents work performed  
by me or under my direction in compliance with the "Corner  
Recordation Act" (70-22-101, et seq., M.D.A.)

D.K. Marquardt  
Signature of Surveyor & Seal

Date: 7-9-81 Reg. No. 2989ES


Employer: \_\_\_\_\_

Office of Clerk and Recorder, County of Lincoln. This "corner  
record" was filed for record on the July 17<sup>th</sup> day of 1981,  
was noted on the cross-index plat and is assigned page No. 1106, in  
book No. 1

Charles L. Vaughn, by Betty Bach  
County Official Deputy

Cross Index No. G-9 T. 36N R. 27W PMM

Sec. 9



• - corner this sheet