

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Closing Corner T. 36N R. 27W P.M.M. Lincoln County

Retracement Record:


Set a fir post 3' long, 3" square 24" in the ground with 6 grooves on SE & W faces from which:

A pine 36" dia. bears S.4°45' E. 451ks.

A pine 12" dia. bears S.37°W. 1251ks.

Found bearing tree stump - get brass cap record bearing & distance from SE BT

See C. of S Nos. 388 and 541 for adjacent corners.

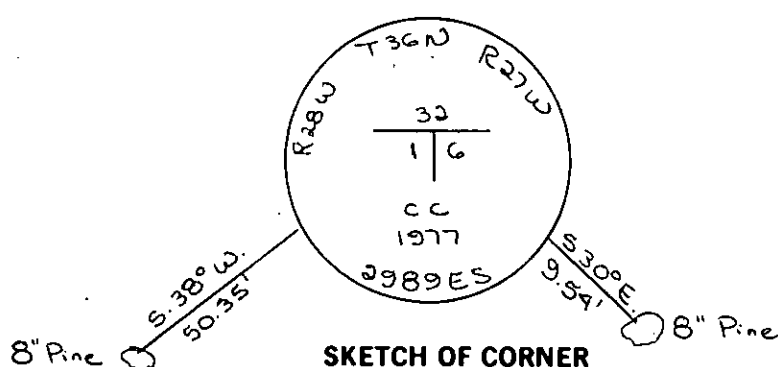

SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Ch'f

I, D.K. Marquardt
certify that this Corner Record correctly represents work performed by me or under by direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

D.K. Marquardt
Signature of Surveyor & Set

Date: 7-6-81 Reg. No. 2989ES


Employer: _____

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the 17th July day of 1981 was noted on the cross-index plat and is assigned page No. 1146 In book No. 1

Eleanor L. Vaughan, by Betty Ben,
County Official deputy

Cross Index No. A-1 T. 36N R. 27W PMM
A-25 T. 36N R. 28W

Sec. 6



• corner this sheet