


CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

Record: Stone
 Fir 14 inches S. 36° E. 15 lks.
 Tamarack 10 inches N. 19° W. 44 lks.
 Found BLM brass caps

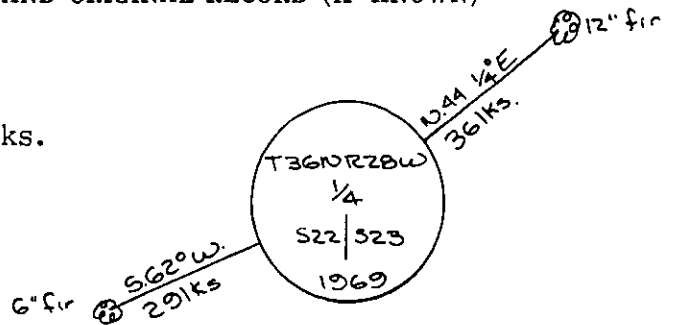

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work:.....

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
 (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

Surveyor's Seal

I, D. K. Marquardt
 certify that the information shown herein is true and correct.

Signature of Ground Party Chief


I, D. K. Marquardt
 certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

D. K. Marquardt
 Signature of Surveyor

E.S. 2989
 Registration Number

DIAGRAM OF CORNER:

N. T36N R28W
1/4



⊙ = Corner recorded on the sheet

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 12th day of August, 1981, was noted on the cross-index plat and is assigned page No. 1216, in book No. 1

Deane L. Vanderby by Patty Bell
 County Official Deputy