

INSTRUCTIONS

1. Original and correct record used to evaluate the corner position.
2. Description of monument found, note discrepancies in the record, state method of correction, lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner South 1/4 Cor. Section 35 T. 36 N. R. 27 W. P.M.M. Lincoln County
and Cor. No. 1 of H.E.S. 337 T. 35 N. R. 27 W.

ORIGINAL RECORD G.L.O. 1893

Set a limestone, 20x6x6 ins. 15 ins. in the ground, for 1/4 sec. cor. marked 1/4 on the N. face, from which
A fir 8 ins. diam. bears N 44° 30' W 13 lks. dist. marked 1/4 S.B.T.
A fir 6 ins. diam. bears S 9° 30' W 25 lks. dist. marked 1/4 S.B.T.

H.E.S. 337 RECORD U.S.D.A. 1915

Beginning at Cor. No. 1, identical with the 1/4 Cor. for Sec. 35, heretofore described, (a limestone, 5x6x6 ins. above ground, marked and witnessed as described by the Surveyor General). Set a stake alongside, marked 1 H.E.S. 337 on S. face, and a cross (x) on top of the 1/4 cor. for exact corner point, from which

A cross (x) on a fir 8 ins. dia., bears N 1° 00' E, 13 lks. dist.

A cross (x) on a fir 8 ins. dia., bears N 61° 30' W, 19 lks. dist. each blazed and scribed 1 H.E.S. 337 BT. Raise a mound of earth, 4 ft. base, 2 ft. high, S. of corner.

B.L.M. REMONUMENTATION 1960

The 1/4 sec. cor. of sec. 35 on the S. bdy. of the Tp., monumented with a limestone, 20x6x6 ins., loosely set and mkd. 1/4 on the N. face, and witnessed by the original bearing trees.

At the corner point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, in concrete, with brass cap mkd.

T36N R27W
1/4 S 35
1960

from which the original bearing trees:

A fir, 16 ins. diam., bears S 9 1/2° W, 25 lks. dist., mkd. 1/4 S BT.

A fir, 17 ins. diam., bears N 44 1/2° W, 13 lks. dist., mkd. with an overgrown blaze. (Record)

Bury the original stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, N. of the iron post.


EVIDENCE FOUND

Found a B.L.M. brass cap, 2 ins. above ground, mkd. as shown above, from which:

A fir, 21 ins. dia., bears S 9 1/2° W, 16.5 ft. dist., mkd. with an overgrown blaze. (G.L.O. 1893 BT)

A fir, 18 ins. dia., bears N 44 1/2° W, 8.6 ft. dist., Scribing visible. (G.L.O. 1893 BT)

(OVER)

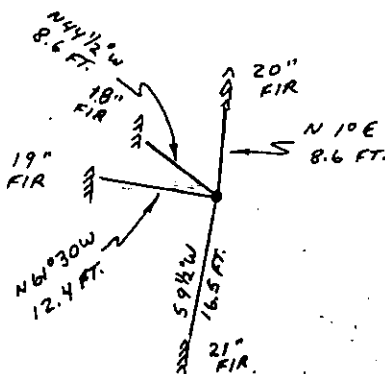

DECL. 21° E

SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Philip A. Helps

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (10-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 9/87 Reg. No. 4739 S


Employer: F & H Land Surveying, Whitefish

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the October 6 day of 1987, was noted on the cross-index plat and is assigned page No. 3662, in book No. _____

Cross Index No. Z - 19

T. 36 N. R. 27 W. P.M.M.

Sec. 35



• corner this sheet

(CONT'D)

A fir, 20 ins. dia., bears $1^{\circ} 00'$ E, 8.6 ft. dist. mkd. with an overgrown blaze. (USDA 1915 BT)

A fir, 19 ins. dia., bears $N 61^{\circ} 30'$ W, 12.4 ft. dist. mkd. with an overgrown blaze. (USDA 1915 BT)

A mound of stone N. of the brass cap.

CORNER PERPETUATION

Set a galvanized steel guard post with a Property Boundary decal and a Survey Marker decal 3 ft. west of the brass cap. Painted red bands around the bearing trees and painted the scribing and blazing. Attached bearing tree signs and attached Land Survey Monument signs.