

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner N.W. COR. SECTION 34 T. 36 N. R. 27 W. P.M.M. Lincoln County

ORIGINAL RECORD G.L.O. 1893

Set a limestone, 13x7x6 ins. 9 ins. in the ground, for Cor. to Secs. 27, 28, 35, & 34 marked with 1 notch on S. and 3 notches on E. edges, from which:

A fir, 14 ins. diam., bears N 67° 20' 00" E 40 lks. dist. mkd. T36N R27W S27 BT

A fir, 14 ins. diam., bears S 37° E 34 lks. dist. mkd. T36N R27W S34 BT

A fir, 6 ins. diam., bears S 25° 20' W 32 lks. dist. mkd. T36N R27W S 33 BT

A fir, 8 ins. dia., bears N 26° 30' W 29 lks. dist. mkd. T36N R27W S28 BT

EVIDENCE FOUND

Found a limestone, 13x7x6 ins., firmly set, mkd. with 1 notch on the S. edge and 3 notches on the E. edge, and witnessed by the remains of the original bearing trees:

An 18" fir stump, bears N 67° 20' E, 26.4 ft. dist., with visible scribing.

A 15" fir stump, bears S, 37° E, 23.0 ft. dist., mkd. with an overgrown blaze.

A fir, 13 ins. dia., bears S 25° 20' W, 21.6 ft. dist., mkd. with an overgrown blaze.

A fir, 16 ins. dia., bears N 26° 30' W, 19.4 ft. dist., mkd. with an overgrown blaze.

CORNER PERPETUATION

At the corner point, set an aluminum pipe, 2 1/2 ins. dia., 30 ins. long, 24 ins. in the ground, with a 3 1/4 ins. aluminum cap mkd.


T36N R27W from which new bearing trees:

4739 S28|S27 A fir, 7 ins. dia., bears N 30° E, 20.8 ft. dist., mkd. T36N R27W S27 BT.

S S33|S34 A fir, 5 ins. dia., bears S 34° E, 25.7 ft. dist., mkd. T36N R27W S34 BT.

1987 Buried the original stone alongside the aluminum monument.

Set a galvanized steel post with a Survey Marker decal, 3 ft. south of the aluminum cap. Painted red bands around the bearing trees and painted the scribing and blazing. Attached bearing tree signs and attached Land Survey Monument signs.

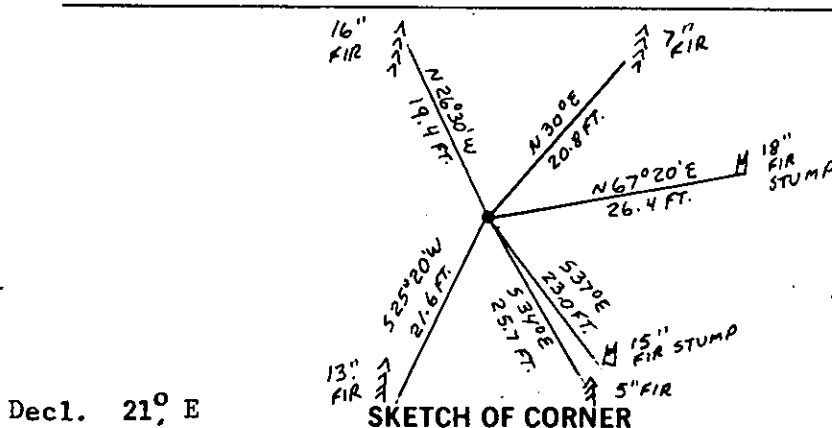

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Philip A. Helps

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 10/87 Reg. No. 4739 S


Employer: F & H Land Surveying, Whitefish

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Nov 30, 1987 day of 1987, was noted on the cross-index plat and is assigned page No. 3721, in book No. _____

Janet E. Sugel by Bill Brasch
County Official Deputy

Cross Index No. V - 13 T. 36N R. 27 W PMM

Sec. 34



• corner this sheet