

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner North 1/4 Cor. Sec. 34 T. 36 N. R. 27 W. P.M.M. Lincoln County

ORIGINAL RECORD G.L.O. 1893

Set a limestone, 13x9x8 ins. 9 ins. in the ground, for 1-4 Sec. Cor. marked 1-4 on N. face, from which
 A fir, 12 ins. diam., bears N 39° W, 28 lks. dist., mkd. 1-4 S BT.
 A pine, 24 ins. diam., bears S 90° W, 15 lks. dist., mkd. 1-4 S BT.

B.L.M. REMONUMENTATION 1960

The 1/4 sec. cor. of secs. 27 and 34, monumented with a limestone, 12x7x6 ins., firmly set and mkd. 1/4 on the N. face, and witnessed by the remains of the original bearing trees.
 At the corner point, Set an iron post, 30 ins. long, 2 1/2 ins. dia., 28 ins. in the ground, in concrete, with brass cap mkd:

T36N R27W from which the remains of the original bearing trees:

- 1 S 27 A stump, 21 ins. dia., bears S 90° W, 15 lks. dist. (Record)
4 S 34 A stump, 20 ins. dia., bears N 39° W, 28 lks. dist. (Record)

The new bearing trees:

- 1960 A fir, 8 ins. dia., bears N 75 1/4° E, 37 lks. dist., mkd. 1/4 S 27 BT.
 A fir, 7 ins. dia., bears S 0 1/2° E, 88 lks. dist., mkd. 1/4 S 34 BT.

Bury the original stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, N. of the iron post.

EVIDENCE FOUND

Found a B.L.M. brass cap, mkd. as shown above, from which:

The remains of a stump bears, N 39° W, 18.5 ft. dist., no scribing visible, BLM bearing tree sign attached. (GLO 1893 BT)

The remains of a stump bears S 90° W, 9.9 ft. dist., no scribing visible, BLM bearing tree sign attached. (GLO 1893 BT)


A fir, 11 ins. dia. bears N 75 1/4° E, 24.9 ft. dist., mkd. with an overgrown blaze. (BLM 1960 BT)

A fir, 10 ins. dia. bears S 0 1/2° E, 57.4 ft. dist., mkd. with an overgrown blaze. (BLM 1960 BT)

Mound of stone N. of the iron post.

CORNER PERPETUATION

Set a galvanized steel post with a Survey Marker decal, 3 ft. East of the brass cap. Painted red bands around the bearing trees and painted the scribing and blazing. Attached bearing tree signs and Land Survey Monument signs.

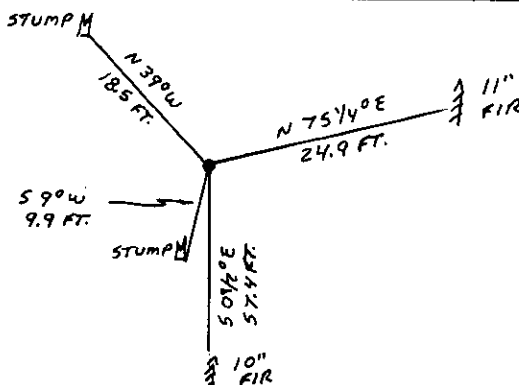

DECL. 21° E. SKETCH OF CORNER

CERTIFICATION

I, _____
 certify the information shown herein is true and correct.

Signature Ground Party Chief

Philip A. Helps

I, _____
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-201, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 10/87 Reg. No. 4739 S


Employer: F & H Land Surveying, Whitefish

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Nov 30 day of 1987, was noted on the cross-index plat and is assigned page No. 3722, in book No. _____

Janet E. Sugil by Bill Brackhoff
 County Official Deputy

Cross Index No. V - 15 T. 36 N R. 27 W PMM

Sec. 34

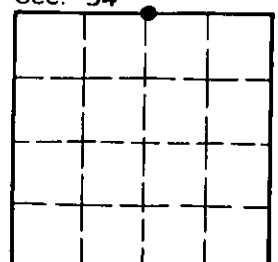

• - corner this sheet