

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner S.W. Cor., Section 34 T. 36 N. R. 27 W. P.M.M. Lincoln County

ORIGINAL RECORD G.L.O. 1893

Set a limestone, 18x8x5 ins. 12 ins. in the ground, for Cor. to Secs. 3, 4, 33, and 34 mkd. with 3 notches on E. and W. edges, from which

A fir, 9 ins. diam., bears N 66° E, 8 lks. dist., mkd. T36N, R27W S 34 BT.

A fir, 5 ins. diam., bears S 74° E, 19 lks. dist., mkd. T35N R27W S 3 BT.

A fir, 5 ins. diam., bears S 8° W, 4 lks. dist., mkd. T35N R27W S 4 BT.

A fir, 6 ins. diam., bears N 33° W, 13 lks. dist., mkd. T36N R27W S 33 BT.

RESURVEY RECORD G.L.O. 1913

The cor. of secs. 3, 4, 33, and 34, which is a stone, 18x8x3 ins. poorly set, and marked as described by the surveyor general. I reset the stone, 12 ins. in the ground, and destroy the marks on the bearing trees, which have been killed by fire.

A fir, 10 ins. dia., bears N 20° E, 65 lks. dist., mkd. T36N R27W S 34 BT.

A tamarack, 9 ins. dia., bears N 46° W, 45 lks. dist., mkd. T36N R27W S 33 BT.

Hereafter this cor. will refer to secs. 33 and 34 of T36N R27W only.

B.L.M. REMONUMENTATION 1970

The cor. of secs. 33 and 34, on the S. bdy, of the Tp., as determined from the remains of the original bearing trees:

A fir root crown, 14 ins. dia., bears N 20° E, 65 lks. dist., mkd. with a partial blaze, no visible scribing.

A larch root crown, 12 ins. dia., bears N 46° W, 45 lks. dist., mkd. with a partial blaze, no visible scribing.

At the corner point, Set an iron post, 30 ins. long, 2 1/2 ins. dia., 24 ins. in the ground, with brass cap mkd.

T36N R27W from which a new bearing tree:

S 33 | S 34 A fir, 5 ins. dia., bears N 22 1/4° E, 121 lks. dist., mkd. X BT.

T35N R27W
S 3

1970

EVIDENCE FOUND

Found a B.L.M. brass cap, mkd. as shown above, from which


A larch stump, 12 ins. dia., bears N 46° W, 30.3 ft. dist., with visible scribing. (GLO 1913 BT)

A fir, 8 ins. dia., bears N 22 1/4° E, 79.8 ft. dist., mkd. with an overgrown blaze. (BLM 1970 BT)

The four original GLO 1893 BTs were searched for and not found.

The GLO Resurvey of 1913 BT to the N.E. was searched for and not found.

(OVER)

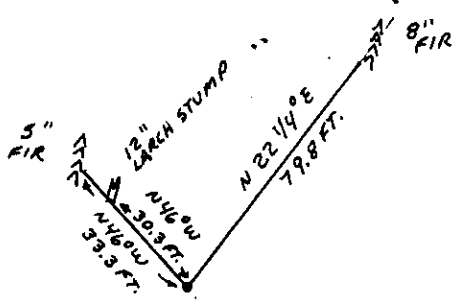

DECL. 21° E SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Philip A. Helps

certify that this Corner Record correctly represents work performed by me or under by direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal


Date: 10/87 Reg. No. 4739 S

Employer: F & H Land Surveying, Whitefish

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Nov. 30 day of 1987, was noted on the cross-index plat and is assigned page No. 3727, in book No. _____

Cross Index No. Z - 13 T. 36 N R. 27 W P.M.M.

Sec. 34

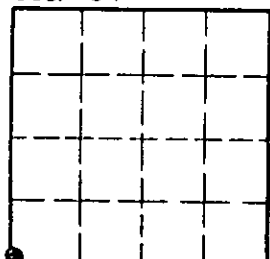

• corner this sheet

CORNER PERPETUATION

A new bearing tree:

A fir, 5 ins. dia., bears N 46° W, 33.3 ft dist., mkd. T36N R27W S33 BT.

Set a galvanized steel post with a Survey Marker decal, 3 ft. North of the brass cap. Painted red bands around the bearing trees and painted the scribing and blazing. Attached bearing tree signs and Land Survey Monument signs,