

- INSTRUCTIONS
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner S. 1/4 Cor. Section 34 T. 36 N. R. 27 W. P.M.M. Lincoln County

ORIGINAL RECORD G.L.O. 1893

Set a limestone, 14x12x9 ins. 10 ins. in the ground, for 1-4 Sec. Cor. marked 1-4 on N. face, from which:

A fir, 5 ins. diam., bears N 24° W 37 lks. dist., mkd. 1-4 S BT.

A tamarack, 10 ins. diam., bears S 22° W, 37 lks. dist., mkd. 1-4 S BT.

RESURVEY RECORD G.L.O. 1913

The 1/4 sec. cor. The tree in sec. 3 has been destroyed. Therefore, I mark a fir, 9 ins. dia., bears S 8° E, 38 lks dist., 1/4 S 3 BT.

EVIDENCE FOUND

Found a limestone, 14x12x9 ins., firmly set, mkd. 1/4 on N. face, from which:

A fir, 15 ins. dia., bears N 24° W, 24.4 ft. dist., with visible scribing. (GLO 1893 BT)

The fallen and rotted remains of a larch, 10 ins. dia., bears S 22° W, 24.3 ft. dist., with scribing visible. (GLO 1893 BT)

A fir, 10 ins. dia., bears S 8° E, 24.7 ft. dist., with visible scribing. (GLO 1913 BT)

CORNER PERPETUATION

At the corner point, set an aluminum pipe, 2 1/2 ins. dia., 30 ins. long, 24 ins. in the ground, with a 3 1/4 ins. aluminum cap, mkd.


T36N R27W

4739 S 1/4 S 34

Bury the stone alongside of the aluminum monument.

1987

Set a galvanized steel post with a Survey Marker decal and a Property Boundary decal, 3 ft. West of the aluminum monument. Painted red bands around the bearing trees and painted the scribing and blazing. Attached bearing tree signs and Land Survey Monument signs.

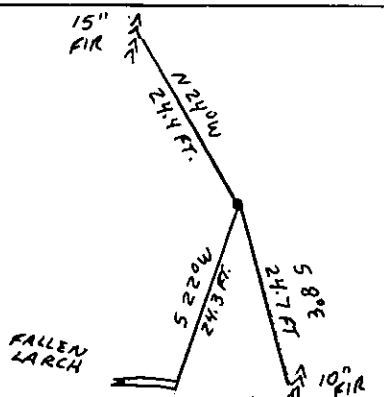

DECL. 21° E

SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

Philip A. Helps

I, _____
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 10/87 Reg. No. 4739 S


Employer: F & H Land Surveying, Whitefish

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Nov. 30 day of 1987, was noted on the cross-index plat and is assigned page No. 3728, in book No. _____

County Official [Signature]

Cross Index No. 2 - 15 T. 36 N R. 27 W PMM

Sec. 34

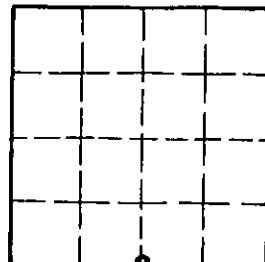

• corner this sheet