

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner S.E. Cor. of Section 34 T. 36 N. R. 27 W. P.M.M. Lincoln County

ORIGINAL RECORD G.L.O. 1893.

Set a post, 4 ft. long, 4 ins. square, 24 ins. in the ground, for Cor. to Secs. 2, 3, 34, and 35, marked: T36N S 35 on N.E., R27W S 2 on S.E., T35N S 3 on S.W., and S 34 on N.W. faces, with 2 notches on E. and 4 notches on W. edges, from which:

A fir, 7 ins. diam., bears N 10° 30' E, 56 lks. dist., mkd. T36N R27W S 35 BT.

A fir, 7 ins. diam., bears S 41° 30' E, 125 lks. dist., mkd. T35N R27W S 2 BT.

A fir, 16 ins. diam., bears S 54° W, 85 lks. dist., mkd. T35N R27W S 3 BT.

A fir, 10 ins. diam., bears N 71° W, 76 lks. dist., mkd. T36N R27W S 34 BT.

RESURVEY RECORD G.L.O. 1913

The cor. of secs. 2, 3, 34 and 35, which is a post, which has decayed. I obliterate the marks on same and set a limestone, 12x10x6 ins. 8 ins. in the ground, for cor. of secs. 34 and 35, mkd. with 2 grooves on E. and 4 grooves on W. face, from which:

A tamarack, 5 ins. diam., bears N 72° E, 42 lks. dist., mkd. T36N R27W S 35 BT.

A fir, 14 ins. diam., bears N 70° W, 73 lks. dist., mkd. T36N R27W S 34 BT.

I destroy the marks on the trees to the S.E. and S.W. of the cor. which henceforth will refer to secs. 34 and 35 of T36N R27W only.

B.L.M. REMONUMENTATION 1960

The cor. of secs. 34 and 35 on the S. bdy. of the Tp., monumented with a limestone, 12x6x6 ins., loosely set and mkd. with 2 notches on the E. and 4 notches on the W. edges, and witnessed by the original bearing trees.

At the corner point, Set an iron post, 30 ins. long, 2 1/2 ins. dia., 28 ins. in the ground, in concrete, with brass cap mkd.

T36N R27W from which the original bearing trees:

S 34 S 35 A larch, 8 ins. dia., bears N 72° E, 42 lks. dist., mkd. T36N R27W S 35 BT (Record)
S 2 A fir, 14 ins. dia., bears N 70° W, 73 lks. dist., mkd. T36N R27W S 34 BT (Record)

T35N R27W The new bearing trees:


1960 A fir, 10 ins. dia., bears S 65 1/2° E, 26 lks. dist., mkd. T35N R27W S 2 BT.
A larch, 6 ins. dia., bears N 11 1/2° W, 26 lks. dist., mkd. T36N R27W S 34 BT.

Bury the original stone alongside and raise a mound of stone, 3 ft. base, 2 ft. high, N. of the iron post.

EVIDENCE FOUND

Found a BLM brass cap, mkd. as shown above, from which:

(OVER)

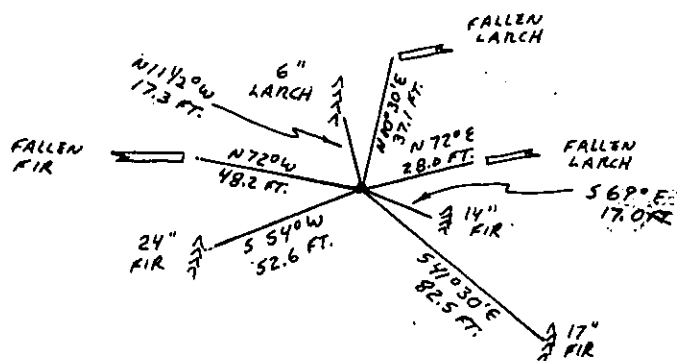

DECL. 21° E SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

Philip A. Helps

I, _____
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal


Date: 10/87 Reg. No. 4739 S

Employer: F & H Land Surveying, Whitefish

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Nov. 30 day of 1987, was noted on the cross-index plat and is assigned page No. 3730, in book No. _____

Cross Index No. Z - 17 T. 36 N R. 27 W P.M.M.

Sec. 34

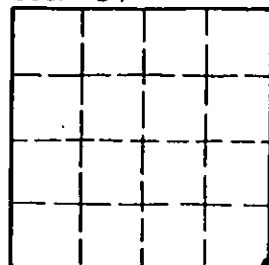

• corner this sheet

A fallen larch, 7 ins. dia., (Rec. fir), bears N 10° 30' E, 37.1 ft. dist., with scribing visible (GLO 1893 BT)

A fir, 17 ins. dia., bears S 41° 30' E, 82.5 ft. dist., scribing visible but partially obliterated. The scribing was obliterated per the G.L.O. Resurvey of 1913. (GLO 1893 BT)

A fir, 24 ins. dia., bears S 54° W, 52.6 ft. dist., scribing visible but partially obliterated. The scribing was obliterated per the G.L.O. Resurvey of 1913. (GLO 1893 BT)

A fallen fir, 10 ins. dia., bears N 72° W, (N71°W Rec.), 48.2 ft. dist., with scribing visible. (GLO 1893 BT). This same tree is also called for in the GLO Resurvey of 1913 as N 70° W, 73 lks.

A fallen larch, 8 ins. dia., bears N 72° E, 28.0 ft. dist., with scribing visible. (GLO 1913 BT.)

A fir, 14 ins. dia., bears S 69° E, 17.0 ft. dist., mkd. with an overgrown blaze. (BLM 1960 BT)

A larch, 6 ins. dia., bears N 11 1/2° W, 17.3 ft. dist., with scribing visible. (BLM 1960 BT)

The tree is scribed S 35 instead of S 34 as shown in the BLM Record)

CORNER PERPETUATION

Set a galvanized steel post with a Survey Marker decal and a Property Boundary decal, 3 ft. North of the brass cap. Painted red bands around the bearing trees and painted the scribing and blazing. Attached bearing tree signs and Land Survey Monument signs.

The GLO 1893 BTs, located S 41° 30' E, 82.5 ft. and S 54° W, 52.6 ft., with the scribing partially obliterated, were not painted, nor were bearing tree or Land Survey Monument signs attached.