

# CERTIFIED LAND CORNER RECORDATION

## DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

Record: Set a post 3' x 3" sq. , 24 '' in the ground, from which:

An Alder 5" diam. bears S 59° E 14 lks.

An Alder 7" diam. bears S 54° W 31 lks.

Found: No evidence of original corner's location. Set corner by single proportion.

## DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: JULY 1975

Set a 2" x 30" iron pipe with brass cap, from which:

A 14" fir bears West 70.55',

A fence corner bears North 254.60'

## SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

See Certificate of Survey # 152

Surveyor's Seal


I, \_\_\_\_\_  
certify that the information shown herein is true and correct.

Signature of Ground Party Chief

I, Dean K. Marquardt  
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Dean K. Marquardt  
Signature of Surveyor

## DIAGRAM OF CORNER:

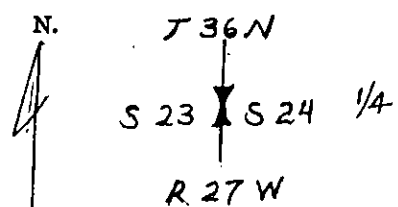

I = Corner recorded on the sheet

ES2989  
Registration Number

Office of Clerk and Recorder, County of Leawards

This "corner record" was filed for record on the 28th day of January 1976, was noted on the cross-index plat and is

assigned page No. 418, in book No. 1

Charles L. Vaughn, Jr.  
County Official