## INSTRUCTIONS

- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- Description of monument and accessories set to perpetuate the corner position
- Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
- 6. Fill in Cross Index & Seciton Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

36N. R. 28W. P.M.M. S. 1/4 Sec. 9 Lincoln Corner\_

I. From original G.L.O. 1894 notes: Set Limestone 18"x10"x7", 12" in ground, mkd. 1/4 on North Face from which:

An 8" Tamarack: bears S.54°W., 92 lks.

A 24" Pine bears N.58°W., 92 lks.

· (SEE NOTE L-A)

II. Found B.L.M. Brass Cap on Iron Pipe, found Orig. Stone North side of Mon. Found 12" Tamarack Stump bears \$54°W., 60.72 ft.

Found 24" Pine Stump bears N.58°W., 60.72 ft.

Found New B.T.s:

A 9" Fir bears N.40 1/2°W., 20.46 ft.


A 13" Fir bears S.80 1/2°E., 64.68 ft.

Found 17" Red Fir bears S.40°E., 22.94 ft.

III. Set Rock Cairn around Mon. Set 54-3 tag on 17" Red Fir (no info. on tag found).

B.L.M. re-mon., June, 1969: Set 21/2" I.P. w/Brass cap, 24" in ground. I-A. S.9 B.T., 7" Fir, bears N.40%°W., 31 lks. S.16 B.T., 12" Fir, bears S.801/2" W., 98 lks.



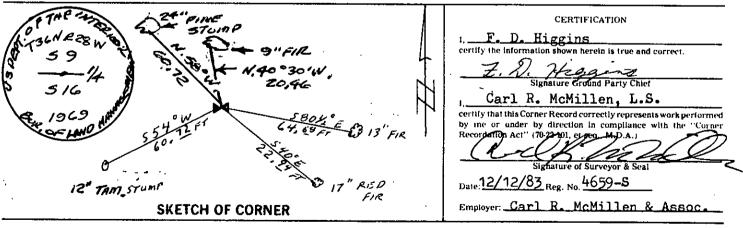

SKETCH OF CORNER			
Office of Clerk and Recorder, County of	. This "corner	Sec. 9	
record" was filed for record on the	_ day of 19 <i>84</i>	<del></del>	
was noted on the cross-index plat and is assigned page No. 255	, in	<del>-</del>	
book No Junet BF Sugal by Be County Official	etty L. Conces ax deputy	-+++	

J-11 T. 36N R. 28W PMM • corner this sheet