


## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner 1 of HES 483 T. 36 N. R. 31 W. P.M.M. Lincoln County

- I. 1915 H.E.S. original record by Fred E. Thieme: Set for Cor. No. 1, a small stone mkd. with a cross (x) under a quartzite stone, 24x8x7 ins., 14 ins. in the ground, mkd. 1 HES 483 on SE face, and a cross (x) on top for the exact corner point, from which,
- A cross (x) on a lodgepole pine, 4 ins. diam., bears N64°36'E, 36 lks. (23.76 ft.) dist.
- A cross (x) on a lodgepole pine, 5 ins. diam., bears S18°52'E, 20 lks. (13.20 ft.) dist.
- Each blazed and scribed 1 HES 483 BT.
- Raise a mound of stone, 4 ft. base, 2 ft. high, SE of corner.
- II. Corner position falls in a newly formed side channel of the Yaak River. Stone and bearing trees obliterated.
- III. Using the Grant Boundary method, I determined a proportion position for Cor. 1. To establish this position, I set two witness corners, which are a 2 1/2 ins. diam. by 30 ins. long aluminum pipe, 24 ins. in the ground, with a 3 1/4 ins. diam. aluminum cap mkd. as shown.

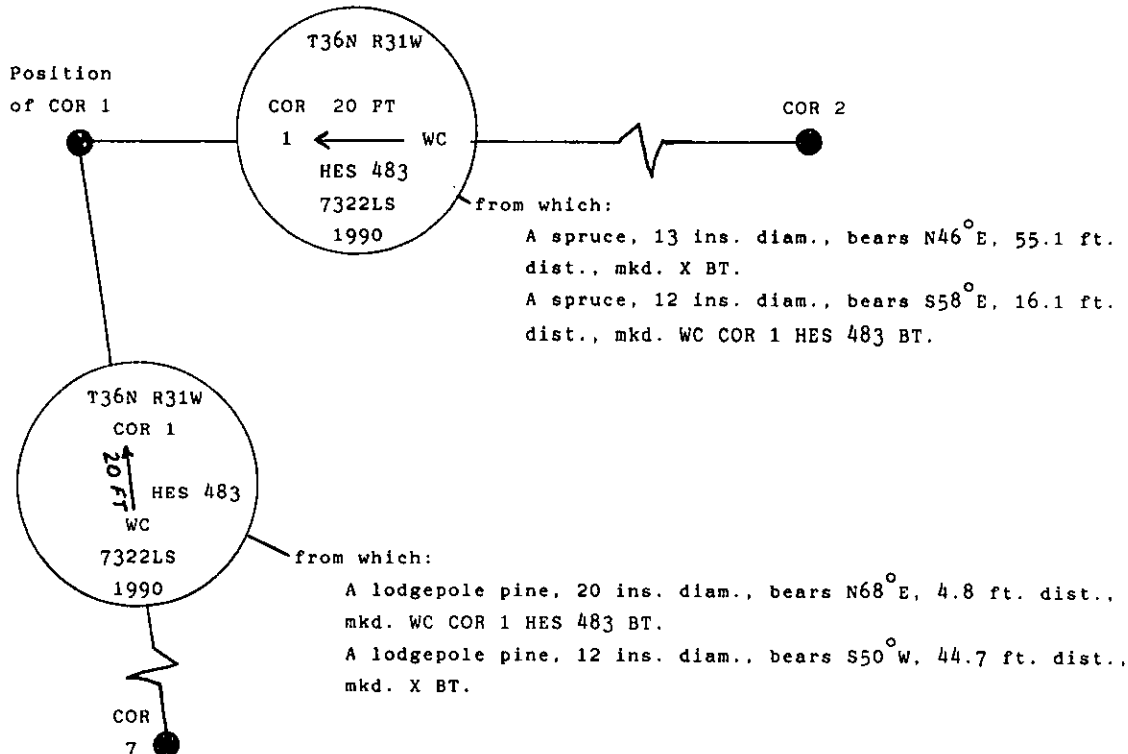

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.  
Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, East and S13° E, 3 ft. Magnetic declination: 20° East.

## CERTIFICATION

I, Kevin A. Todd  
certify the information shown herein is true and correct.

Kevin A. Todd  
Signature Ground Party Chief

I, Alvah P. Hughes  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah P. Hughes  
Signature of Surveyor & Seal

Date: 1/8/91 Reg. No. 7322LS

Employer: U.S. FOREST SERVICE


## SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 2-5-91 was noted on the cross-index plat and is assigned page No. 4525, in book No. Coral M Cummings by Eric Braddock

County Official

1 HES 483 36 N 31 W

Cross Index No. T. R. P.M.M.



• corner this sheet