

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION


Corner Cor. No. 8 HES274, Cor. No. 3 HES431 35, 36N R. 32W. P.M.M. Lincoln County

Record; Cor #3, HES 431- I replace wooden post with a small stone marked with a cross (x) under a quartzite stone 29x10x8 ins., 19 ins. in the ground, marked 8 H.E.S. 274 on SE. face for Cor. No. 8 of accepted H.E.S. No. 274 and 3 H.E.S. 431 on NW. face, for Cor. No. 3 of this survey, and a cross (x) on top for the exact corner point. No bearings available, Mound impracticable, due to proximity to road, Pits already dug.

Cor #8, HES 274- Set for corner No. 8 a larch post 6x6x42 ins., 30 ins. in the ground, marked 8 H.E.S. 274 on SE face and a nail in top for exact corner point. No bearings available, therefore dig pits 24x24x12 ins. crosswise on this and succeeding line 7 ft. dist., and raise a mound of earth 4 ft. base, 2ft. high, SE of corner.

Found: Found a stone 0.3' under the surface of road. No BT's available

Set: Bearing and distances to existing Log Building,  
N78°30'E 50.84 feet and S57°30'E 72.84 feet.  
Hub tack in corners of building as references.  
Painted monument with bright red paint and replaced oil surface.

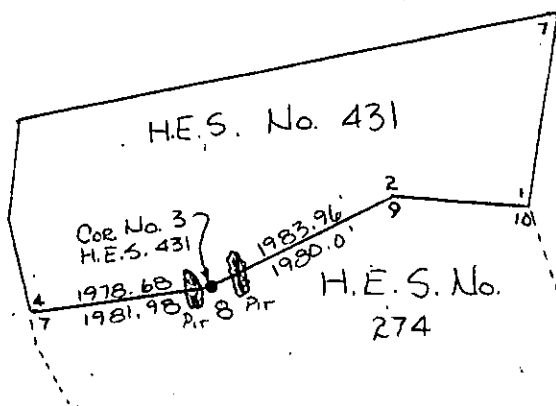

FOUND A STONE  
0.3' UNDER SURFACE  
OF ROAD. NO  
BT'S AVAILABLE



SKETCH OF CORNER.

## CERTIFICATION

I, Jack H. Ninneman

certify the information shown herein is true and correct.

Jack H. Ninneman  
Signature Ground Party Chief

I, Jack H. Ninneman

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Jack H. Ninneman  
Signature of Surveyor & Seal

Date: Dec. 82 Reg. No. 4661S.

Employer: Ninneman Engineering Inc.

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the DEC. 30 day of 1982 was noted on the cross-index plat and is assigned page No. 2123, in book No. \_\_\_\_\_  
Eleanor L. Vaughn by Betty L. Loncas  
County Official deputy

Sec.

H.E.S. 431		
UNSURVEYED		
SECTION		

Cross Index No.

T. 35 N R. 32W PMM

• corner this sheet