

INSTRUCTIONS

1. Original and/or subs. record used to evaluate the corner position.
2. Description of evidence found, and note discrepancies in the record, state method of establish. post or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography files, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

. CERTIFIED CORNER RECORDATION

Corner 1/4 cor. between Sec. 23 & 24 T. 37N R. 27W P.M.M. Lincoln County


Record:

Set a sandstone 20x10x5 ins. 15 ins. in the ground marked 1/4 on west face.

Dug pits for Rms.

Found BLM brass cap

See C.O.S. No. 675 for adjacent corners.

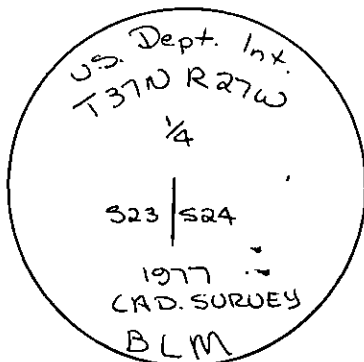

SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, D.K. Marquardt

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

D.K. Marquardt
Signature of Surveyor & Seal

Date 7-8-81 Reg. No. 2289 ES


Employer: _____

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the 17th July day of 1981, was noted on the cross-index plat and is assigned page No. 1116, in book No. 1

Glenn L. Vaughn, by Betty Lee,
County Official Deputy

Cross Index No. P-21 T. 37N R. 27W P.M.M.

Sec. 23

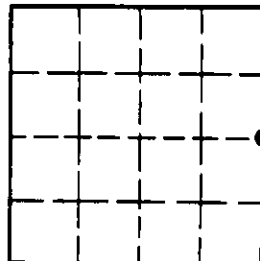

• - corner this sheet