

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

• CERTIFIED CORNER RECORDATION

Corner 1/4 corner between Sec. 11 & 12 T. 37N R. 27W P.M.M. Lincoln County

Record:


Set a sandstone 16x8x6 ins. 11 ins. in the ground marked 1/4 on west face.

Dug pits for Rms.

Found stone solid in ground with 1/4 on west face.

Set alum. cap and buried stone alongside.

See C of S. No 819 for adjacent corners

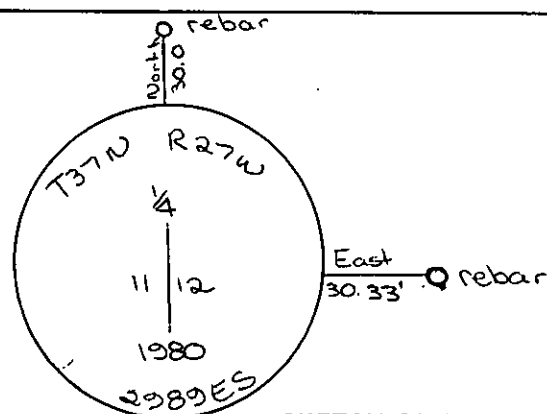

SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, D. K. Marquardt
certify that this Corner Record correctly represents work performed
by me or under my direction in compliance with the "Corner
Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 7-7-81 Reg. No. 2989ES


Employer: _____

Office of Clerk and Recorder, County of Lincoln. This "corner
record" was filed for record on the 17th July day of 1981.
was noted on the cross-index plat and is assigned page No. 1123 in
book No. 1

Heinrich L. Vaughn, by Scott Lee,
County Official Deputy

Cross Index No. G-21 T. 37N R. 27W P.M.M.

Sec. 11



• - corner this sheet