

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION


Corner 1/4 corner between Sec. 31 & 32 T. 37N R. 27W P.M.M. Lincoln County

Record:

Set a post 3' long 3" square 24" in the ground for 1/4 Sec. cor. marked 1/4 S on N face from which a fir 10" diam. bears N. 62° E. 46 lks and a fir 10" diam. bears N. 70° W. 20 lks.

Found 4" pipe and BT stump with scribing - accepted pipe as corner.

See C. of S. No. 541 for adjacent corners.

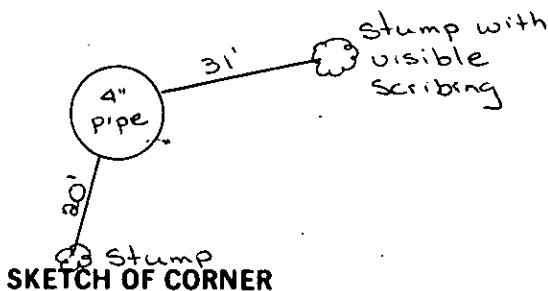

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, D.K. Marguardt
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

D.K. Marguardt
Signature of Surveyor & Seal


Date: 7-6-91 Reg. No. 2989 ES

Employer: _____

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the 17th July day of 1981, was noted on the cross-index plat and is assigned page No. 1154 in book No. 1

Charles L. Vaughan, Jr.
County Official Deputy

Sec. 31



Cross Index No. X-5 T. 37N R. 27W P.M.M.

●: corner this sheet