
PLSS CORNER RECORD

Corner C 1/4 S16 T. 32 N. R. 28 W. P.M.M. LINCOLN County

1. 1989 Certified Corner Recordation by Alvah F. Hughes, MT Reg. No. 7322 LS: At the calculated corner position, I set a 3/4 in. diam. aluminum rod, 30 ins. long, 27 ins. in the ground, in a collar of stone, with a 3 1/4 in. diam. U.S.D.A. aluminum cap marked:



I set a 6 ft. galvanized steel guard post with Survey Marker and Property Boundary decals attached, 3 ft. east of the monument. I mark and scribe two new bearing trees:

A pine, 7 ins. diam, bears N22°E, 30.7 ft.. dist., scribed T32N R28W $\,$ C 1/4 $\,$ S 16 $\,$ BT. A fir, 13 ins. diam, bears N64°W, 11.7 ft.. dist., scribed T32N R28W $\,$ C 1/4 $\,$ S 16 $\,$ BT.

II. Found a 3 1/4 in. diam. U.S.D.A. aluminum cap, in a collar of stone, marked as shown above, from which:

A pine snag, 9 ins. diam, bears N22°E, 30.7 ft.. dist., scribed T32N R28W C 1/4 S 16 BT. A fir, 17 ins. diam, bears N64°W, 11.7 ft.. dist., marked with a healed face.

III. Establish 1 new bearing trees:

A douglas fir, 9 ins. diam, bears N32°E, 27.8 ft. dist., mkd. C 1/4 S16 BT.


Painted the scribed faces red and 6" red band on Bearing Trees. Attached Land Survey Monument and Bearing Tree signs.


Date of Fieldwork: 11/3/2014

Survey crew: T. Hommel, M. McGinnis Magnetic declination: 14° East assumed

Equipment used: Hand compass and loggers tape

U.S. Forest Service, Supervisors Office, 31374 Hwy. 2, Libby, MT 59923 (406) 293-6211

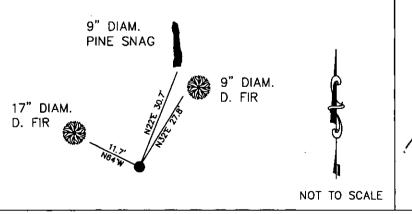



Office of Clerk and Recorder, County of Lincoln

254903 BOOK: CCR CCSR'S PAGE: 12161 Pages:

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 12/04/2014 10:35 KOI: CCSR'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00 BY: Cross Index No. L 11 T. 32N. R. 28W. P.M., MT

Adopted November 7, 2012, Montana Board of Professional Engineers & Land Surveyors

corner this sheet