INSTRUCTIONS

- Description of monument and accessories set to perpetuate the corner position.
 Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
- Certification must be signed and sealed by Registered Land Surveyor in State of Montana
- 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

S. 1/4 Sec. 23 T. 37N. R. 28W. P.M.M. Lincoln Corner

I. From original 1894 G.L.O. notes: Set a Sandstone, 12"x8"x6", 8" in the ground marked 1/4 on W. face, from which:

A Fir 8" diam., bears S.44°45'W., 6 lks.

A Fir 6" diam., bears N.62°W., 37 lks.

(SEE NOTE I-A)

II. Found B.L.M. Brass cap on Iron pipe.

Found 6" Fir stump, bears N.62°W., 24.42 ft.

Found stump hole, bears S.44°45'W., 3.96 ft.

Found 6" Tamarack, bears N.3116E., 4.62 ft., scribing visible.


Found 7" Tamarack, bears S.64½°W., 10.56 ft., scribing visible.

III. Set Rock cairn around Mon.

I-A. B.L.M. re-mon., June, 1969: Set 21/2" I.P. w/Brass cap, 24" in ground. S.23 B.T., 6" Larch, bears N.314°E., 7 lks. S.26 B.T., 7" Larch, bears S.641/2.W., 16 1ks.



· corner this sheet

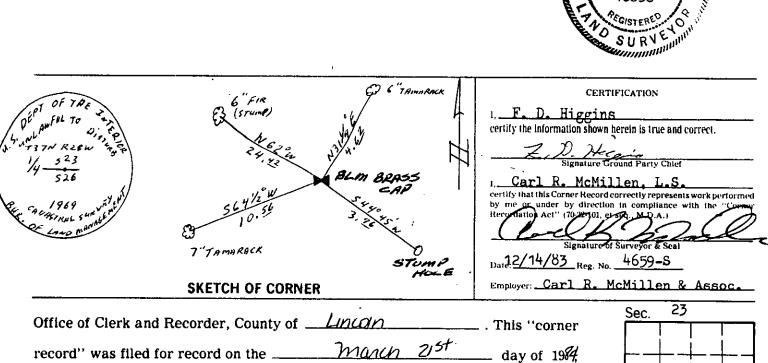

County Official

R-19 T. 37N. R. 28W. PMM

was noted on the cross-index plat and is assigned page No. 2571

book No.