## INSTRUCTIONS

- Original and/or subsequent record used to evaluate the corner position.
   Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- 3. Description of monument and accessories set to perpetuate the corner position.
- Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
   Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
- 6. Fill in Cross Index & Seciton Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

S.E. Cor. Sec. 23 T. 37N R. 28W Corner \_ \_\_ P.M.M. \_ Lincoln

From original 1894 G.L.O. notes: Set post 4' long, 4" square, with 2 notches on I. S. and 1 notch on E. edges, from which:

A 9" Fir bears N.42°30'E., 52 lks.

A 9" Fir bears S.75°E., 38 lks.

A.8" Tamarack bears S.41°45'W., 38 lks.

A 7" Fir bears N.68°30'W., 78 lks.

(SEE NOTE I-A)

Found C.O.E. Brass Cap on iron pipe. II.

Found 19" Fir bears N.42°30'E., 34.3 ft., scribing visible.


Found 25" Pine bears S.75°E., 25.1 ft., scribing visible (G.L.O. calls pine a fir).

Found 11" Pine bears N.79°30'W., 27 ft., mkd. FS/RM.

Set new B.T., 12" Tamarack bears S.42°W., 36.7 ft., mkd. T37N R28W S26 B.T. III.

C.O.E. re-mon., 1969: Set I.P. w/Brass cap. I-A.



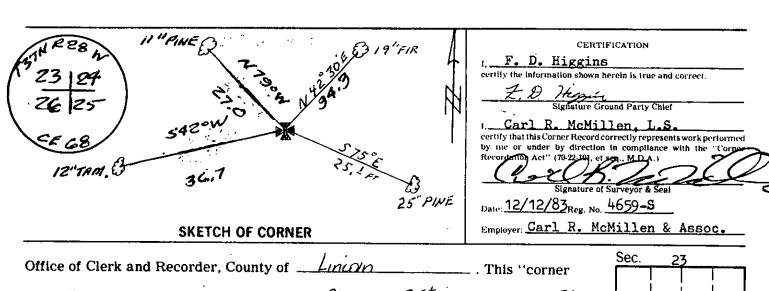

Office of Clerk and Recorder, County of This "corner	Sec. 23	_
record" was filed for record on the Manch &15t day of 1984		
was noted on the cross-index plat and is assigned page No. $2578$ , in	23-	_
book No Janet BF Siegel by Betty L Conces County Official deputy	-+++	-
Cross Index No. R-21 T 37N R 28W PMM	• corner this sh	-