quent record used to evaluate the corner position

Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated

Description of monument and accessories set to perpetuate the corner position.

- Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
 Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 Fill in Cross Index & Seciton Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

E. 1/4 Sec. 26 28W. P.M.M. 37N - R. Lincoln Corner County

From original 1894 G.L.O. notes: Set a post 3' long, 3" square, marked 1/4 S on I. West face, from which:


A Yellow Pine, 30" in diam. bears S.83°E., 93 lks.

A Fir, 8" in diam. bears S.2°15'W., 241 lks. (SEE NOTE I-A)

- Found C.O.E. Brass cap on iron pipe. II. Found 8" Fir, bears N.68°W., 3.30 ft., marked FS/RM. Found 30" Pine stump, bears S.83°E., 61.38 ft.
- Scribed 6" Red Fir, bears N.31°E, 12.30 ft., marked 1/4 S25 B.T. III.
- C.O.E. re-mon., 1969: Set I.P. w/Brass cap. I-A. S.26 B.T., 8" Fir, bears N.68°W., 3.3 ft., mkd. FS/RM.



corner this sheet

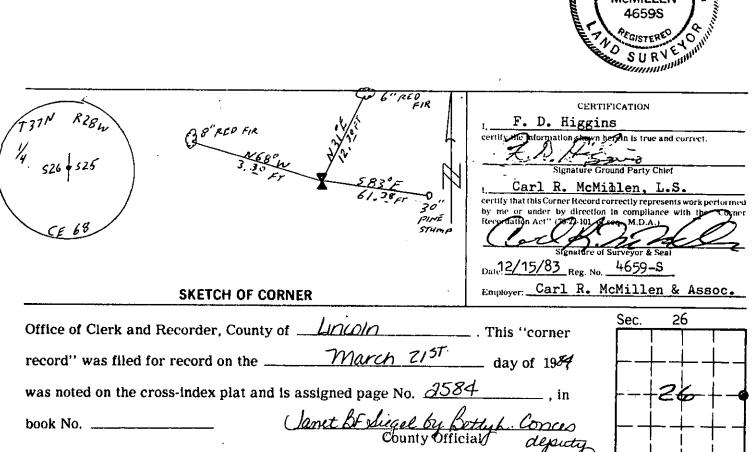

T-21 T. 37N R. 28W PMM