

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Sec. 26, SE $\frac{1}{4}$, NE $\frac{1}{4}$
 Corner U.S. Project Boundary T. 37N R. 28W P.M.M. Lincoln County


No GLO corner established at this point.

Found Corps of Engineers, U.S. Army Project Boundary marker, a 4 $\frac{1}{2}$ " square concrete monument w/ brass cap marked as noted below, at corner. No bearing trees.

Set bearing tree witnesses: 9" fir N58°E 14.7 feet mkd. T37N R28W S26/3909/2, BT signed and painted as per USFS Specs.

11" Ponderosa Pine S50°E 32.7 feet mkd. T37N R28W S26/3909/2, BT signed and painted as per USFS Specs.

Set a steel sign post S. of mon.

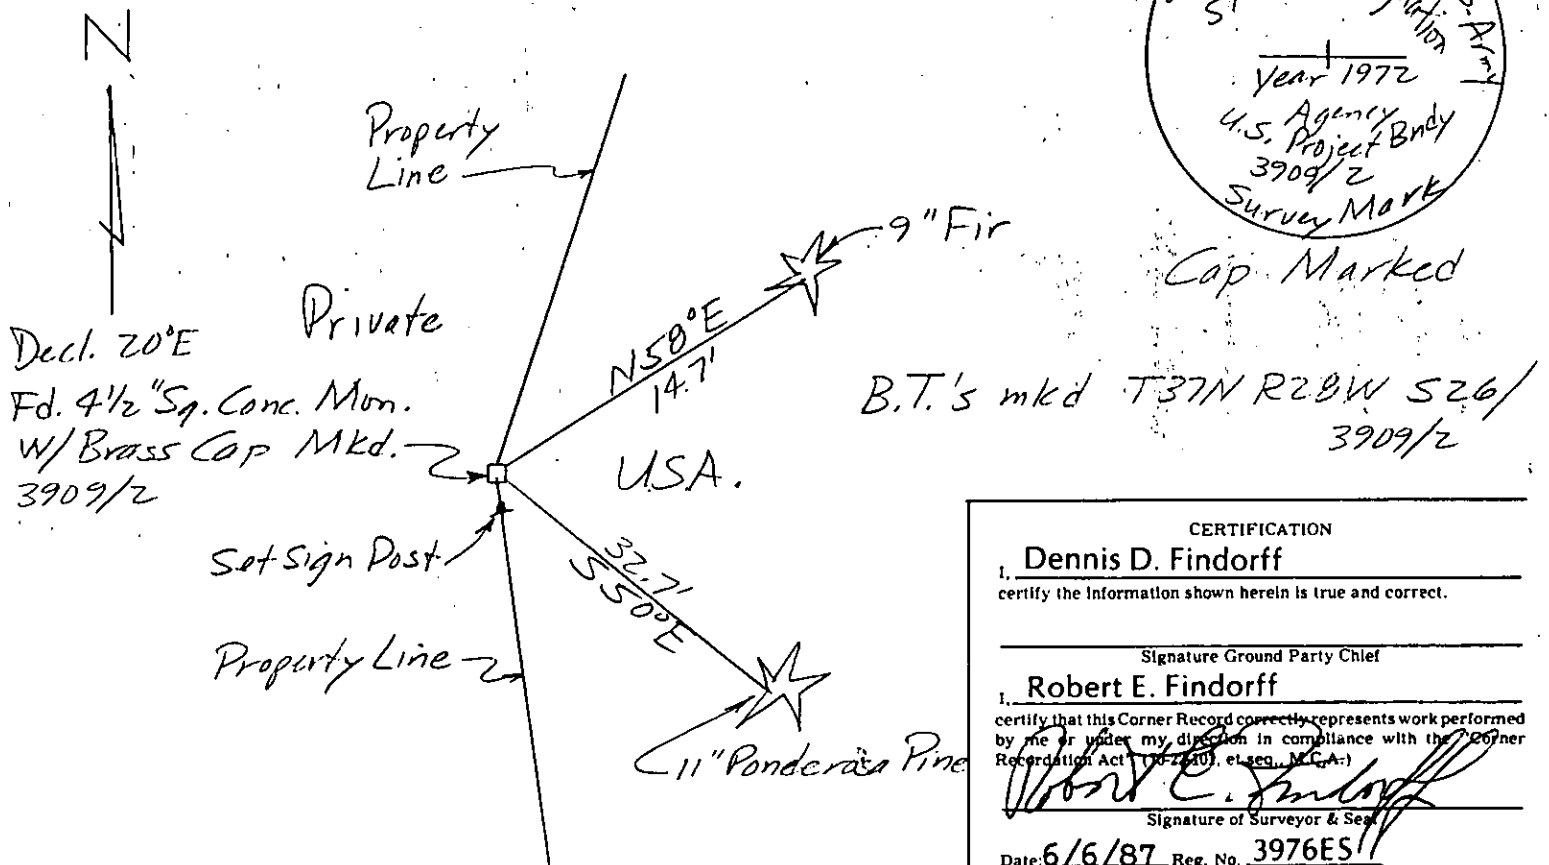

SKETCH OF CORNER (SEE ABOVE)

CERTIFICATION	
1. <u>Dennis D. Findorff</u>	
certify the information shown herein is true and correct.	
Signature Ground Party Chief	
1. <u>Robert E. Findorff</u>	
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act (70-2240), et seq., M.C.A.)	
Signature of Surveyor & Seal	
Date: <u>6/6/87</u>	Reg. No. <u>3976ES</u>
Employer: <u>Self</u>	

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on June 30, 1987 was noted on the cross-index plat and is assigned page No. 3569, in book No. _____

Janet B. Sugil by Sir Smith
 County Official Deputy

Sec. 26, T37N, R28W

• corner this sheet