

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography (lies, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner BOUNDARY MONUMENT 243 T. 37N R. 28W P.M.M. Lincoln County

## RECORD

Internâtionâl Boundary Commission

## FOUND

4½ foot obelisk 9x9 inches at base, set in concrete with numbers 243 on west face. No bearing trees were found.


New bearing trees:

A 13 inch fir bears S 67° W 66.35 feet scribed T37N R28W MON  
243 BT

A 7 inch fir bears S 5° W 35.15 feet scribed T37N R28W MON  
243 BT

Set a U.S.D.A. steel post south 17.50 feet

DECLINATION 19°

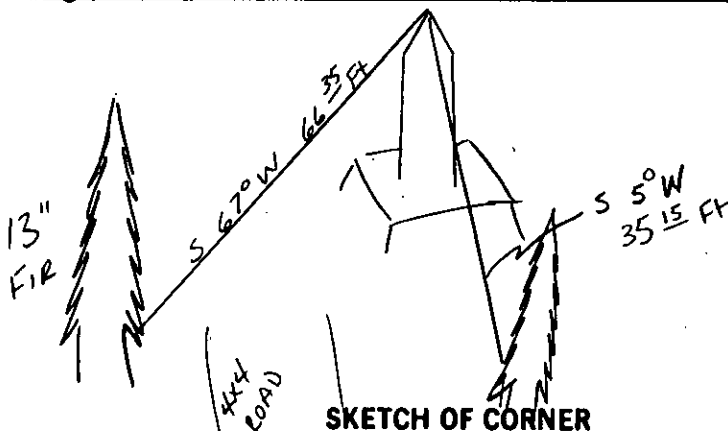

## CERTIFICATION

I, Dan Croft

certify the information shown herein is true and correct.

Dan Croft  
Signature of Registered Land Surveyor

I, GENE WARREN  
certify that this Corner Record correctly represents work performed by me or under my supervision in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)


Gene Warren  
Signature of Registered Land Surveyor

Date: 7-28-89

Employer: ROCKY MOUNT SURVEYORS

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Sept 11, 1989 day of 19 , was noted on the cross-index plat and is assigned page No. 4080, in book No. \_\_\_\_\_

Janet E. Sigal  
County Official

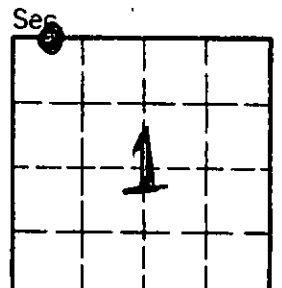

Cross Index No. \_\_\_\_\_ T. 37N R. 28W P.M.M.

• corner this sheet