

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner C.C. OF SECTIONS 2&3 T. 37N R. 28W P.M.M. Lincoln County

ORIGINAL SURVEY BY F. SIZER and A. JAQUETH 1894

Set a quartzite stone 14x10x6 ins., 10 ins. into the ground for closing corner for sections 2 and 3, marked C.C. with B.P. on north and 2 grooves on east and 4 grooves on west faces, from which:
A fir 14 ins. diam. bears S 46 45 W 37 lks. marked T37N R28W S3 BT
A tam. 8 ins. diam. bears S 51 E 21 lks. marked T37N R28W S2 BT

REMONUMENTATION B.L.M. 1969

Set a iron post 30 inches long 2½ inches diam., 24 inches into the ground. From which:

A larch 7 ins. diam. bears S 54½ E 55 lks. marked T37N R28W S 2 CC BT

A fir 6 ins. diam. bears S 61 W 54 lks. marked T37N R28W S 3 C C BT

Buried the stone alongside the iron post.

FOUND

2½ inch brass cap on 2 inch pipe 4 inches out of ground, from which:

A 10 inch stump bears S 57 E 37.00 feet no scribing visible, painted red.

A 13 inch fir bears S 54 E 31.30 feet scribe overgrown

A 34 inch stump bears S 50 W 24.75 feet no scribing visible, painted red

A 11 inch stump bears S 62 W 35.28 feet no scribing visible, painted red

Maintained BTs with required signs and paint.

New BTs.

A 11 inch fir bears: S 17 W 33.10 feet scribed T37N R28W S3 CC BT

Also set a 6 foot steel post south 18 feet.

CANADA


S3 | S2

T37N R28W
CC

1969

DECLINATION 19°

CANADA

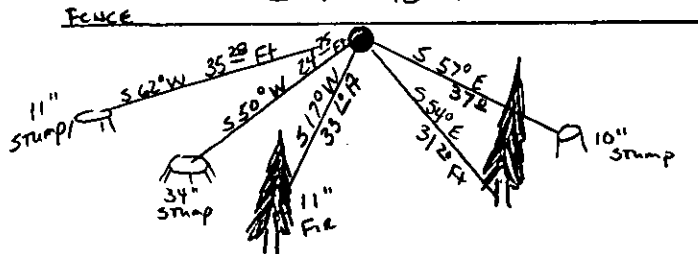

SKETCH OF CORNER

CERTIFICATION

Dan Croft

I, Dan Croft, certify the information shown herein is true and correct.

Dan Croft
Signature of Land Surveyor

I, W. Gene Warren, certify that this corner record correctly represents work performed by me or under my supervision in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.).

W. Gene Warren
Signature of Surveyor


Date: 7-26-89 7-26-89

Employer: ROCKY MOUNTAIN SURVEYORS

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Sept 11, 1989 day of 19, was noted on the cross-index plat and is assigned page No. 4082, in book No. _____

Cross Index No. A-17 T. 37N R. 28W P.M.M.

Sec. 2



• - corner this sheet