

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner NORTH ¼ OF SECTION 10 T. 37N R. 28W P.M.M. Lincoln County

ORIGINAL SURVEY by F. SIZER and A. JAQUETH 1894

Set a sandstone 12x10x5 ins. 8 ins. into the ground for ¼ section corner marked ¼ on west face, from which::

A fir 12 ins. diam. bears N 21½ E 16 lks. marked ¼ s BT  
A tam. 12 ins. diam. bears S 50 W 64 lks. marked ¼ S BT

REMONUMENTATION by B.L.M. 1969

Set a iron post 30 inches long, 2½ ins. diam., 24 ins. into the ground, with brass cap. From which:

Remains of original BTs:

A stump bears N 21½ E 16 lks. marked BT  
A stump bears S 50 W 64 lks. marked BT

New bearing trees:

A fir 9 ins. diam. bears N 10½ E 41 lks. marked ¼ S3 BT  
A fir 8 ins. diam. bears S 1 W 24 lks. marked ¼ S10 BT

## FOUND

A 3½ inch brass cap set 22 ins. into the ground, from which:

A 8 inch fir bears S 1 E 16 feet scribe overgrown  
A 13 inch stump bears S 48 W 42.61 feet with letters BT  
A 17 inch stump bears N 19 E 11.42 feet with letters BT  
A 10 inch fir bears N 10 E 26.96 feet marked ¼ S3 BT


Maintained BTs with required signs and paint, set a U.S.D.A steel post 3 feet south of corner.

T37N R28W

¼  $\frac{S3}{S10}$

1969

DECLINATION 19°

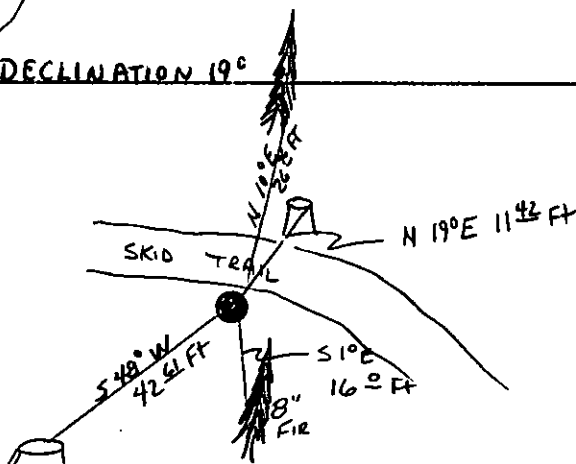

SKETCH OF CORNER

## CERTIFICATION

1. Dan Croft

certify the information shown herein is true and correct.

*[Signature]*  
Signature of Registered Land Surveyor

1. *[Signature]*  
certify that this corner record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-2210, et seq., M.D.A.)

*[Signature]*  
Signature of Registered Land Surveyor


Date: 7-28-89

Employer: ROCKY MOUNTAIN SURVEYORS

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Sept. 11, 1989 day of 19, was noted on the cross-index plat and is assigned page No. 4083, in book No. Janet BT Signed by Bill Buckhoff

County Official *[Signature]*

Sec. 10



Cross Index No. E-15 T. 37N R. 28W P.M.M.

• corner this sheet