

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner NW CORNER of SEC. 11 T37N R. 28W P.M.M. Lincoln County

ORIGINAL SURVEY by F. SIZER and A. JAQUETH 1894

Set a sandstone 14x10x8 ins. 10 ins. into the ground for corner to sections 2,3,10 and 11, marked with 5 notches on south and 2 on east edges, from which:

A tam. 24 ins. diam. bears N 6 15 E 73 lks. marked T37N R28W S2 BT

A tam. 10 ins. diam. bears S 51 45 E 62 lks. marked T37N R28W S11 BT

A tam. 10 ins. diam. bears S 53 45 W 62 lks. marked T37N R28W S10 BT

A tam. 30 ins. diam. bears N 34 W 56 lks. marked T37N R28W S3 BT

REMONUMENTATION by B.L.M. 1968

Set a iron post 30 ins. long 2½ ins. diam. 24 ins. into the ground with brass cap, from which:

The original BTs:

A 24 inch snag bears N 6½ E 73 lks. mkd. T37N R28W S2 BT

A 20 inch stump bears S 51 45 E 62 lks. mkd. BT

A 30 inch stump bears N 34 W 56 lks. mkd. with a overgrown blaze.

New bearing trees:

A 7 inch larch bears N 61 E 26 lks. mkd. T37N R28W S2 BT

A 8 inch larch bears S 31 E 89 lks. mkd. T37N R28W S11 BT

A 8 inch larch bears S 19 W 23 lks. mkd T37N R28W S10 BT

A 7 inch fir bears N 11 W 49 lks. mkd. T37N R28W S3 BT

## FOUND

A 3½ inch brass cap set in mound of stone, from which:

A 8 inch larch snag bears S 29 E 59.10 feet mkd. T37N R28W S11 BT

A 10 inch larch bears S 20 W 15.36 feet scribe overgrown

A 10 inch larch bears N 61 E 17.00 feet mkd. T37N R28W S2 BT


A 10 inch fir bears N 11 W 32.23 feet scribe overgrown

A 24 inch stump bears S 54 W 61.50 feet with letters W S10

A 33 inch stump bears N 33 W 37.00 feet with no scribing visible

A 24 inch blowdown bears N 8 E 48.00 feet mkd. T37N R28W S2 BT

( over )

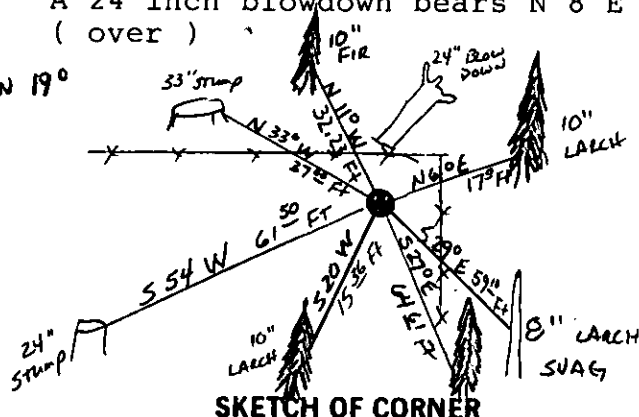

SKETCH OF CORNER

I, Dan Croft  
certify the information shown herein is true and correct.

Dan Croft  
Signature of Head Party Chief

I, GENE WARREN  
certify that this corner record correctly represents work performed by me or under my supervision in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Gene Warren  
Signature of Registered Land Surveyor

7-28-89  
Date

27345  
Employer


ROCKY MOUNT SURVEYORS

Office of Clerk and Recorder, County of Lincoln This "corner record" was filed for record on the Sept 11, 1989 day of 19, was noted on the cross-index plat and is assigned page No. 4099, in book No. \_\_\_\_\_

Janet St. Sigel by Dan Backoff  
County Official

Cross Index No. E-17 T. 37N R. 28W P.M.M.

Sec. 11



• - corner this sheet

Maintained found BTs with required signs and paint, and set a U.S.D.A. steel post 3 feet south of corner.

New BT:

A 12 inch larch bears S 27 E 64.61 feet scribed T37N R28W S11 BT

