

- 25
- INSTRUCTIONS**
- Original and/or subsequent record used to evaluate the corner position.
  - Description of evidence found, note discrepancies in the record, state method of evaluation, lost or obliterated corners.
  - Description of monument and accessories set to perpetuate the corner position.
  - Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lines, position of accessories, etc.
  - Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
  - Fill in Cross Index & Section Diagram at bottom of sheet.

## **CERTIFIED CORNER RECORDATION**

Corner EAST 1/4 COR. SEC. 8 T. 37N R. 28W P.M.M. Lincoln County

### Original Survey by F. Sizer & A. Jaqueth 1894

Set a limestone 14x10x10 inches, 10 inches in the ground for 1/4 section corner marked  $\frac{1}{4}$  on west face from which;  
a pine 20 ins. diam. bears N  $13\frac{1}{2}$  W 23 lks. mkd. 1/4 S BT  
A tam. 5 ins. diam. bears N  $41\frac{1}{2}$  E 51 lks. mkd. 1/4 S BT

### Remonumentation by G.L.O. 1930

Set a iron post 30 inches long, 1 inch in diam. 28 inches in the ground, for 1/4 sec. cor., sec. 8 only. from which:  
A fir 14 ins. diam. bears S  $34\frac{1}{2}$  W 69 lks. mkd. 1/4 S8 BT  
A fir 16 ins. diam. bears N  $56\frac{1}{2}$  W 83 lks. mkd. 1/4 S8 BT

### Maintained by B.L.M. 1969

Found brass cap for 1/4 sec. 8 only, from which:

The remains of the original BTs;  
A 20 inch fir bears S  $34\frac{1}{2}$  W 69 lks. mkd. 1/4 S8 BT  
A 15 inch fir snag bears N  $56\frac{1}{2}$  W 87 lks. mkd. 1/4 S8 BT  
The new BT;  
A 12 inch fir bears S 85 E 29 lks. mkd. 1/4 S8 BT  
Added markes 1969 to brass cap.


### Found

A 2 $\frac{1}{2}$  inch brass cap , from which;  
A 16 inch fir bears N 80 W 18.75 feet scribe overgrown  
( record S 85 E )

New BT;

A 8 inch fir bears N 20 W 45.69 feet scribed 1/4 S8 BT  
Maintained found BT with required signs and paint. set a 6 foot steel post 3 feet south.

DECLINATION 19°

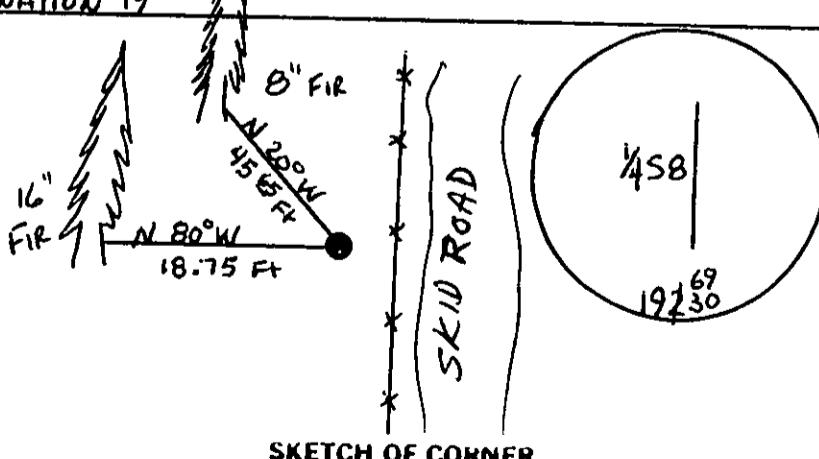

<b>CERTIFICATION</b>	
DAN CROFT	
certify the information contained in this Corner Recordation	
<i>Dan Croft</i>	
Signature of Land Surveyor	
H. GENE WARREN	
certify that this Corner Recordation represents work performed by me or under my direction in compliance with the "Corner Recordation Act" 10-2-201 MCA, M.D.A.C.	
<i>H. Gene Warren</i>	
Signature of Registered Land Surveyor	
Date: 8/14/89 Reg. No. 27345	
Employer: _____	

Office of Clerk and Recorder, County of Lincoln This "corner record" was filed for record on the Dec 8, 1989 day of 19 , was noted on the cross-index plat and is assigned page No. 4146 in book No. \_\_\_\_\_

*Dan & Be Sealed by Bill Buckley  
County Official Dap*

