

- 26
- INSTRUCTIONS**
- Original and/or subsequent record used to evaluate the corner position.
 - Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 - Description of monument and accessories set to perpetuate the corner position.
 - Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lines, position of accessories, etc.
 - Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 - Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner NORTHEAST COR. SEC. 8 T. 37n R. 28w P.M.M. Lincoln County

Original Survey by F. Sizer & A. Jaqueth 1894


Set a sandstone 14x8x6 ins. 10 ins in the ground for corner of sec. 4,5,8 and 9 marked with 5 notches on south and 4 notches on east edges, from which;

A tam. 14 ins. diam. bears N 49 E 34 lks. mkd. T37N R28W S4 BT
 A tam. 12 ins. diam. bears S 36½ E 45 lks. mkd. T37N R28W S9 BT
 A tam. 16 ins. diam. bears S 50½ W 24 lks. mkd. T37N R28W S8 BT
 A tam. 18 ins. diam. bears N 65½ W 50 lks. mkd. T37N R28W S5 BT

Remonumentation G.L.O. 1930

Set a iron post 30 ins. long, 2 ins. diam., 28 ins. in the ground for corner of sections 5 and 8 only, from which;

A fir 4 ins diam. bears S 67 W 29 lks. mkd. T37N R28W S8 BT
 A tam. 6 ins. diam. bears N 72 W 43 lks. mkd. T37N R28W S5 BT




Found



A G.L.O. 2½ inch brass cap buried 4 inches under ground in the edge of a skid trail, from which:

A 12 inch fir bears S 68 W 19.12 feet mkd. T37N R28W S8 BT
 A 12 inch larch bears N 70 W 28.45 feet mkd. T37N R28W S5 BT
 Maintained BTs with required signs and paint, set a 6 foot steel post 4 feet south.

DECLINATION 19°

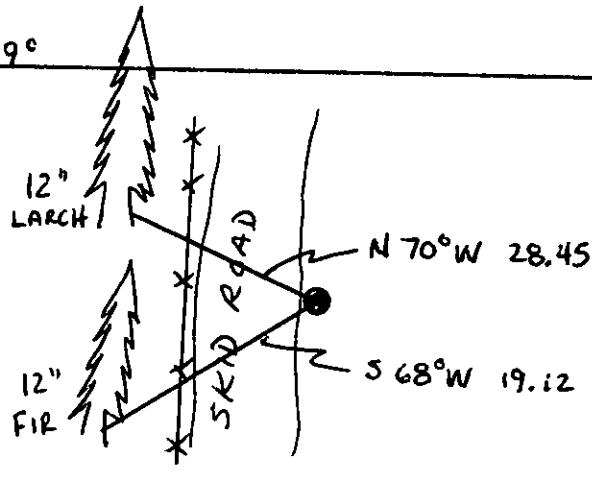

SKETCH OF CORNER

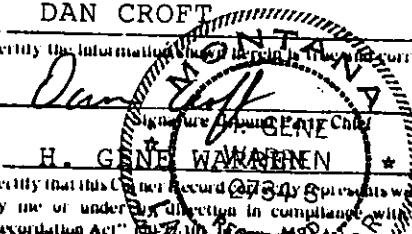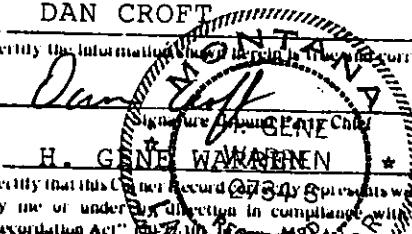CERTIFICATION	
I, <u>DAN CROFT</u> , certify the information herein contained, true and correct.	
	
Signature <u>DAN CROFT</u>	
I, <u>H. GENE WARREN</u> , certify that this Corner Record 2734 is a true record of work performed by me or under my direction in compliance with the "Corner Recordation Act" of the State of Montana.	
	
Signature <u>H. GENE WARREN</u>	
Date <u>8/14/89</u> Reg. No. <u>2734S</u>	
Employer: <u>ROCKY MTN. SURVEYORS</u>	

Office of Clerk and Recorder, County of Lincoln This "corner record" was filed for record on the Dec 8, 1989 day of 19 . was noted on the cross-index plat and is assigned page No. 4147 , In book No. _____

Dan Croft, Surveyor, Seal
County Official *Dan Croft*

