

- INSTRUCTIONS**
- Original and/or subsequent record used to evaluate the corner position.
 - Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 - Description of monument and accessories set to perpetuate the corner position.
 - Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lines, position of accessories, etc.
 - Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 - Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner NORTHWEST COR. SEC. 9 T. 37N R. 28W P.M.M. Lincoln County

Original Survey by F. Sizer & A. Jaqueth 1894

Set a sandstone 14x8x6 ins. 10 ins. in the ground for corner to sec. 4,5,8 and 9 marked with 5 notches on south and 4 notches east edges, from which;

A tam. 14 ins. diam. bears N 49 E 34 lks. marked T37N R28W S4 BT
A tam. 12 ins. diam. bears S 36½ E 45 lks. marked T37N R28W S9 BT

A tam. 16 ins. diam. bears S 50½ W 24 lks. mkd. T37N R28W S8 BT
A tam. 18 ins. diam. bears N 65½ W 50 lks. mkd. T37N R28W S5 BT

Remonumentation B.L.M. 1969

For the cor. of sec. 4 & 9, monumented with a sandstone of record size, firmly set, marked as stated in original record and witnessed by the remains of the original bearing trees;

A stump bears N 49 E 34 lks. with no visible marks

A larch snag 16 ins. diam. bears S 36½ E 45 lks. mkd. T37N R28W S9 BT

Set a iron post 30 ins. long, 2½ ins. diam. 24 ins. in the ground from which:

A fir 9 ins. diam. bears N 31 E 45 lks. mkd. T37N R28W S4 BT

A larch 8 ins. diam. bears S 50 E 48 lks. mkd. T37N R28W S9 BT
buried original stone alongside the iron post.

Found



A 3½ inch brass cap, from which:

A 14 inch stump bears N 49 E 23.15 feet with no visible marks
A 16 inch larch snag bears S 41 E 29.20 feet mkd. T37N R28W S9 BT

A 9 inch fir bears N 32 E 29.75 feet scribe overgrown.

A 8 inch larch bears S 50 E 31.60 feet scribe overgrown maintained BTs with required signs and paint, set a 6 foot steel post 3 feet north.

DECLINATION 18°

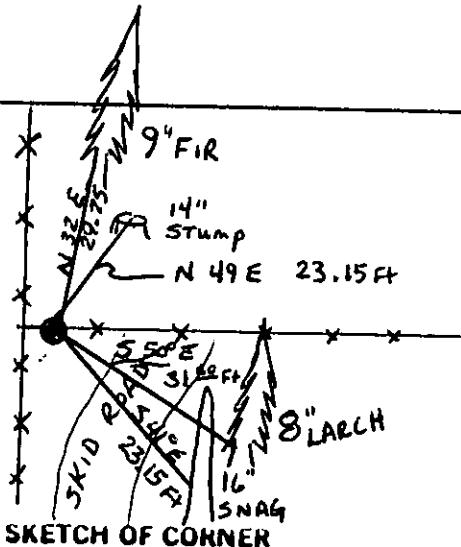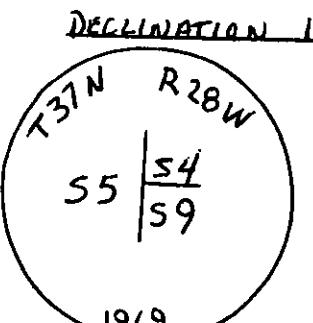

CERTIFICATION	
I, DAN CROFT	
certify the information shown above to be correct.	
SOUTHERN ROCKY MOUNTAIN SURVEYORS	
Signature of Surveyor	
H. GENE WARRENGENE	
certify that this Corner Recordation was performed by me or under my direction in accordance with the "Corner Recordation Act" (Montana Law, M.D.A.)	
Signature of Surveyor	
Date: 8/14/89 Reg. No. 4148	
Employer: ROCKY MTN. SURVEYORS	

Office of Clerk and Recorder, County of Lincoln This "corner" Sec. 9
record" was filed for record on the D.C. 8, 1989 day of 19,
was noted on the cross-index plat and is assigned page No. 4148, In
book No. _____

Janet St. Sager by Bill Buckley
County Official *Day*

