

- INSTRUCTIONS
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner COR. FOR SECTIONS 9 & 16 T. 37N R. 28W P.M.M. Lincoln County

Original Survey by F. Sizer & A. Jaqueth 1894

Set a limestone 14x12x10 ins. 10 ins. in the ground for corner to sec. 8,9,16, and 17, marked with 4 notches on south and east edges from which;

A 16 inch tam. bears N 19 E 53 lks. mkd. T37N R28W S9 BT
A 5 inch fir bears S 59 45 E 20 lks. mkd. T37N R28W S16 BT
A 18 inch tam. bears S 57 W 40 lks. mkd. T37N R28W S17 BT
A 16 inch tam. bears S 5 30 W 20 lks. mkd. T37N R28W S8 BT

1930 Resurvey by R. Lyman

The old corner for sections 8,9,16 and 17 which is a stone 12x12x12 ins. above ground mkd. and witnessed as described in the official records, except the NE BT is cut. Since this corner will refer to sec. 9 and 16 only I erased the marks from the BTs west of the corner and mkd. a new BT as follows,
A 12 inch fir bears N 40 E 16 lks. mkd. T37N R28W S9 BT

Remonumentation by B.L.M. 1969



The corner of sec. 9 and 16, as determined from the remains of the original BTs ;

A stump bears N 40 E 60 lks. mkd. BT
A stump bears N 19 E 53 lks. mkd. BT
A larch snag 20 ins. diam. bears S 59 45 E 20 lks. mkd. 37N R28W S 16 BT
A larch 18 ins. diam. bears N 55½ W 20 lks. with defaced scribing
At the corner point;
Set an iron post, 30 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap, from which;
A fir 8 ins. diam. bears N 42 E 139 lks. mkd. T37N R28W S9 BT
A fir 12 ins. diam. bears S 5 E 80 lks. mkd. T37N R28W S16 BT

Found

A 3½ inch B.L.M. brass cap, from which;
A 20 inch larch snag bears S 58 E 12.80 ft. mkd. T37N R28W
A 18 inch fir bears S 34 E 23.12 ft. mkd. with overgrown scribe
A 12 inch fir snag bears S 5 E 53.0 ft mkd. T37N R28W S16 BT
A 11 inch fir bears N 41 E 91.40 ft. mkd. with overgrown scribe
A stump bears N 19 E 35.0 ft no visible mks.
A stump bears N 40 E 39.65 ft no visible mks.
Maintained BTs with required signs and paint, set a 6 foot steel post 3 feet north of monument.

Declination 19

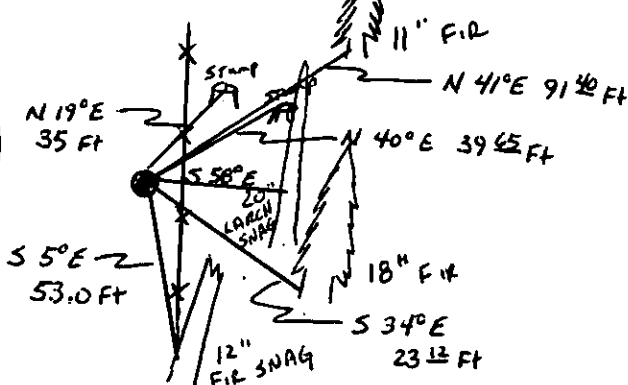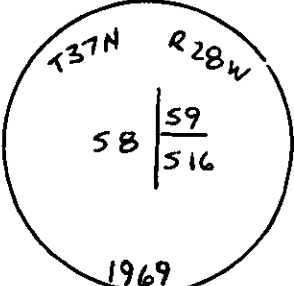

SKETCH OF CORNER

CERTIFICATION

I, DAN CROFT MONTANA
certify the information herein is true and correct.

I, H. GENE WARREN
certify that this corner record represents work performed by me or under my direction in compliance with the "Corner Recordation Act" of the State of Montana.

H. GENE WARREN
Signature of Surveyor & Seal

Date 8/14/89 Reg. No. 27345

Employer: _____

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Dec 8, 1989 day of 19 , was noted on the cross-index plat and is assigned page No. 4152 , in book No. _____

Grant H. Sugih by Bill Buehler
County Official

Sec. 16
