

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**

Corner EAST 1/4 SECTION 16 T. 37N R. 28W P.M.M. Lincoln County

Original Survey by F. Sizer & A. Jaqueth 1894

Set a post 3 feet long, 3 ins. square 24 ins. in the ground, for 1/4 sec. cor., marked 1/4 S on west face; from which:  
 A tam. 12 ins. diam. bears S 40 E 61 lks. mkd. 1/4 S BT  
 A tam. 12 ins. diam. bears S 10 45 W 56 lks. mkd. 1/4 S BT

Remonumentation B.L.M. 1969


The 1/4 sec. cor. of sections 15 & 16, as determined from the remains of the original bearing trees:  
 A stump bears S 40 E 61 lks. with no visible marks.  
 A larch 24 ins diam. bears S 10 45 W 56 lks mkd. 1/4  
 At the corner point, set a iron post 30 ins. long 2 1/2 ins. diam. 24 ins. in the ground, with brass cap.  
 From which;  
 A larch 6 ins. diam. bears N 34 E 15 lks. mkd. 1/4 S15 BT  
 A fir 8 ins. diam. bears N 26 1/2 W 19 lks. mkd. 1/4 S16 BT

Found


A 3 1/2 inch B.L.M. brass cap, from which;  
 A 8 inch fir bears N 28 W 12.58 feet scribe overgrown  
 A 4 inch larch snag bears N 31 E 9.95 feet scribed 1/4 S15 BT  
 A 26 inch larch bears S 11 W 36.55 feet with 1/4 S

The new bearing tree;  
 A 6 inch larch bears S 64 E 11.90 feet scribed 1/4 S15 BT

Maintained original BTs with required signs and paint, set a 6 foot steel post 3 feet south.



DECLINATION 19°

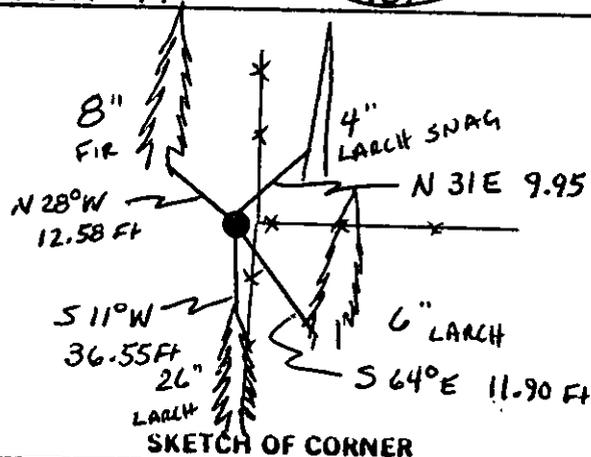

CERTIFICATION MONTANA

I, DAN CROFT certify the information herein to be true and correct.

H. GENE WARREN  
 Signature Group Party Chief

H. GENE WARREN 2734 S  
 certify that this corner has been correctly represented as performed by me or under my supervision in accordance with the "Corner Recordation Act" (70-2730), M.C.A.

H. Gene Warren  
 Signature of Surveyor & Seal

Date 8/14/89 Reg. No. 2734S  
 Employer: ROCKY MTN. SURVEYORS

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Dec 8, 1989 day of 19, was noted on the cross-index plat and is assigned page No. 4154, in book No. \_\_\_\_\_

Grant of Seal by Bill Biehoff  
 County Official

