

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence, note discrepancies in the record, state method of establishing or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


Corner CEE 1/64 Section 9 T. 37 N R. 28 W P.M.M. Lincoln County

I set a 5/8 inch dia. x 24 inch long rebar with yellow PVC cap Stamped: KED 4975 S from which;

A Douglas Fir, 7½ inches DBH, bears S 60°W 27.0
feet from center of tree, Scribed: CEE 1/64 S9 BT.

A Douglas Fir, 11 inch DBH, bears S 9°E 31.1 feet from center of tree, Scribed: CEE 1/64 S9 BT.

Painted a 6 inch wide red band around BTs with BT signs on front and warning signs #54.9 on back.

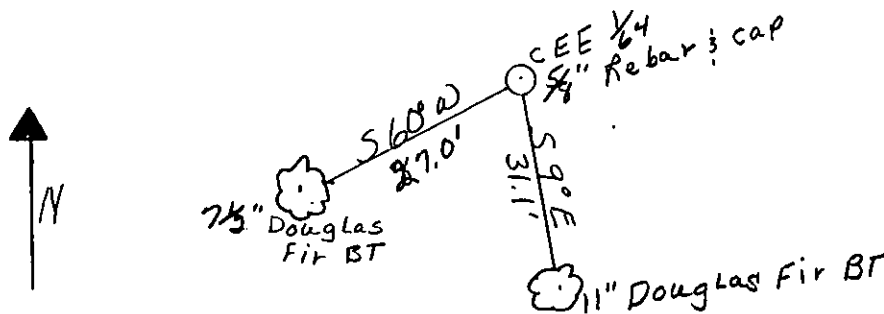

CERTIFICATION

Ken E. Davis

certify the information shown herein is true and correct.

John Damon, Brian Leisz, Bill

Signature Ground Party Chief

1. _____
certify that this Corner Record correctly represents work performed
by me or under my direction in compliance with the "Corner
Recordation Act" (70-22-101 et seq., M.U.A.)

Signature of Surveyor & Seal
REGISTERED 49 5

Date: 8/15/50 Registrar: W. D. Davis
Employer: Davis Surveying, Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner

record" was filed for record on the Aug 23 day of 1971

was noted on the cross-index plat and is assigned page No. 4575, in

book No. _____

Coral M. Cummings by Bill Buckhoff

Sec.