

INSTRUCTIONS

1. Original and/or subsection record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography files, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner C 1/4 Section 9 T. 37 N R. 28 W P.M.M. Lincoln County

I. 1991 Davis Surveying, Inc.



I set a 5/8 inch dia x 24 inch long rebar with yellow PVC cap stamped: KED 4975 S from which;

A Larch, 12 1/2 inches DBH, bears S 86°E 24.7 feet from the center of tree, Scribed: C 1/4 S9 BT.

A Douglas Fir, 12 inches DBH, bears S 25°E 35.4 feet from the center of tree, Scribed: C 1/4 S9 BT.

Painted a 6 inch wide red band around BTs with BT signs on front and warning signs #54.9 on back.

C 1/4 Cor

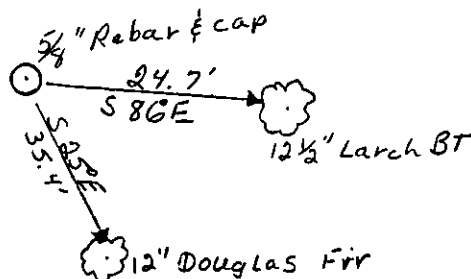

SKETCH OF CORNER

CERTIFICATION

Ken E. Cavis

I certify the information shown herein is true and correct.

John Damon, Brian Leisz, Bill

Signature Ground Party Chief

Reichel

I certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal
 Ken E. Cavis
 Registered Professional Land Surveyor
 License No. 4975 S

Date: 8/25/91

Employer: Davis Surveying, Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner

record" was filed for record on the Aug 23 day of 1991

was noted on the cross-index plat and is assigned page No. 4576, in

book No. _____

Coral M. Cummings by Pine Bookery

Sec.
