INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Nº 1 H.E.S. 499 Nº 2 HES. 500 Nº 4 H.E.S. 1137 UNSURVEYED SECTION 28 T. 37 N R. 31 W P.M.M. LINCOLN County

(1) A SMALL STONE MARKED W/(X) UNDER A QUARTZITE STONE 24 x 9 x 8 INS IN GRD, 1 HES 499 ON SW FACE
(X) ON TOP
X ON LP PINE 12 INS. DIA BEARS S 65°22' W, 21 LKS SCRIBED 1 HES 499 B.T.
(X) ON LP PINE 9 INS DIA BEARS S 9°04' W 26 LKS SCRIBED 1 HES 499 B.T.

(2) FOUND STONE, PER RECORD, NO EVIDENCE OF B.T.S

(3) I MAKE 2 NEW B.T.S.
A 7" DIA. FIR BEARS N 46½°E, 33.5 FEET
A 4" DIA. LARCH BEARS N 02°W, 28.0 FEET

SCRIBED: 1 HES 499
2 HES 500
4 HES 1157

C.O.S. Nº _____

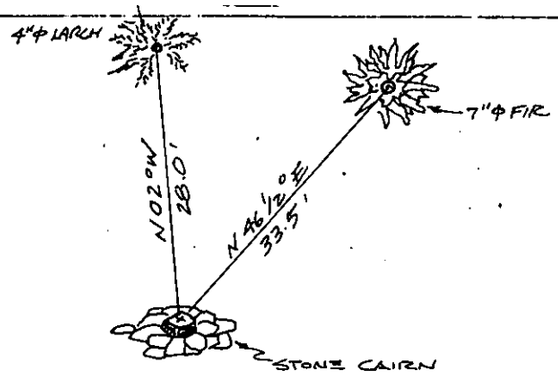

SKETCH OF CORNER

CERTIFICATION

I, GERALD E. BUNTON
certify the information shown hereon is true and correct
[signature]
Signature Cadastral Party Chief

I, GERALD E. BUNTON
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101 [illegible] A.C.A.)
[signature]
Signature of Surveyor & Seal

Date: 9/12/83 Reg. No. 4974-S

Employer: BUNTON'S TECHNICAL SERVICES

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the 21st day of NOV 19 83, was noted on the cross-index plat and is assigned page No. 2373, in book No. _____ Janet BF Siegel by Betty L. Conces deputy
County Official

H.E.S. 499
Sec. UNS. 28, T37N, R31W



• - corner this sheet

Cross Index No. _____ T. 37 R. 31 PMM