

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

HES 503 COR 4 SEC 21 T37N R31W LINCOLN CO.

FND OLD STONE MON W/ "X" CUT 0.80' ± ABOVE GRD
"4HES 403" WRITTEN ON SIDE (REMOVED)

FND OLD BT LAYING DOWN ROTTING SCRIBED

"HES 503" W/ OLD SIGN "S28W 14' 5/67"

FND OLD ROCK PILE S48°E 3.9' DIST.

SET 3" ALUM CAP STAMPED "HES 503 COR 4"

SET BT 13" DOUGLAS FIR N45°W 17.10' DIST

BLAZED & SCRIBED "X BT"

SET BT 13" DOUGLAS FIR S21°W 28.75' DIST


BLAZED & SCRIBED "HES 503 COR 4"

PAINTED "BT" ON BACK.

SET STEEL POSTS W/ DECALS S4-Z & S4-9

1) EAST 1.0' DIST

2) SOUTH 1.6' DIST.

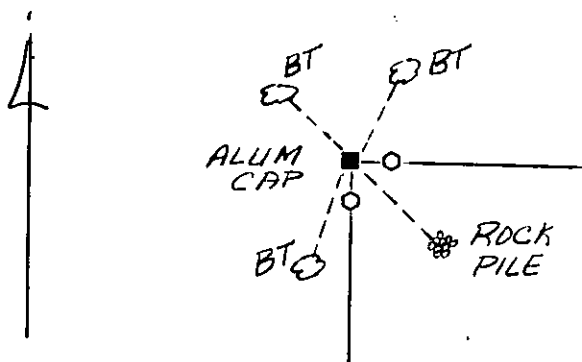

SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party, Chief

Thomas E. Sands

I, _____
certify that this Corner Record correctly represents work performed
by me or under by direction in compliance with the "Corner
Recordation Act", (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal

Date: 7/23/93 Reg. No. 7975-S


Employer: Sands Surveying, Inc.

Office of Clerk and Recorder, County of Lincoln This "corner
record" was filed for record on the July 27, 1993 day of 19,
was noted on the cross-index plat and is assigned page No. 5361, in
book No. _____

Coral M. Cunningham
County Official

Cross Index No. HES 503-4 T. 37N R. 31W PMM

Sec.



• corner this sheet