


- INSTRUCTIONS
1. Original and/or subsequent record used to evaluate the corner position.
  2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
  3. Description of monument and accessories set to perpetuate the corner position.
  4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
  5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
  6. Fill in Cross Index & Section Diagram at bottom of sheet.

# CERTIFIED CORNER RECORDATION

HES 481 COR 2 SEC 32 T37N R31W LINCOLN CO.

FND OLD POINTED STONE MON 0.80' ABOVE GRD  
 & "ZHES 481" WRITTEN ON SIDE  
 FND OLD BT 24" LARCH STUMP 6' HIGH  
 S47°W 37.00' DIST OLD SIGN READS: N51°E 37'  
 DIDNOT OPEN BLAZE; DIDNOT REPLACE SIGN. 5/2/61

SET BT 10" LODGEPOLE PINE N34°W 16.60' DIST.  
 SCRIBED "X BT"  
 SET BT 18" LARCH N89°E 4.50' DIST  
 SCRIBED "ZHES 481"  
 SET STEEL POSTS W/DECALS 52-4 / 52-9  
 1) N16°E 1.4' DIST  
 2) WEST 0.80' DIST

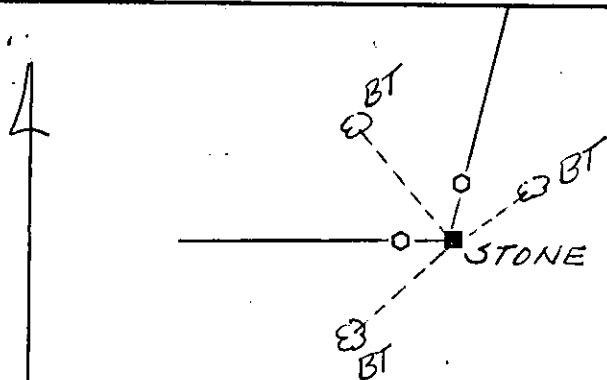

SKETCH OF CORNER

## CERTIFICATION

I, \_\_\_\_\_  
 certify the information shown herein is true and correct.

Signature Ground Party Chief  
 1. Thomas E. Sands

I, \_\_\_\_\_  
 certify that this Corner Record correctly represents work performed  
 by me or under by direction in compliance with the "Corner  
 Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal  
 Date: 7/23/93 Reg. No. 7975-S  
 Employer: Sands Surveying, Inc.

Office of Clerk and Recorder, County of Lincoln . This "corner  
 record" was filed for record on the July 27, 1993 day of 19 ,  
 was noted on the cross-index plat and is assigned page No. 5386 , in  
 book No. \_\_\_\_\_

Coral M. Cummings  
 County Official

Cross Index No. HES481-2 T. 37N R. 31W PMM

Sec.			

• - corner this sheet