

CERTIFIED CORNER RECORDATION

Corner 4 HES 506 Sec. 32 T. 37 N R. 31 W P.M., MT Lincoln County


- I. 1915 U.S. Forest Service original record by Fred E. Thieme: Set for Cor. No. 4, a small stone, marked with a cross (X), under a quartzite stone, 24 x 10 x 7 ins., 14 ins. in the ground, marked 4 HES 506 on E face, and a cross (X) on top for the exact corner point, from which:

A cross (X) on a larch tree, 12 ins. diam., bears N 66° 28' W, 11 lks. dist.

A cross (X) on a fir tree, 15 ins. diam., bears S 24° 13' E, 10 lks. dist., each blazed and scribed 4 H E S 506 BT.

Raised a mound of earth, 4 ft. base, 2 ft. high, E of corner.

- II. Found a 2 1/2 in. daim. aluminum pipe, firmly set in a small collar of stone, 9 ins. above the ground, with a 3 1/4 in. diam. aluminum cap mkd. as shown. No record found for the origin of this monument.



from which:


An uprooted fir stump, bears S 37° E, 8.5 ft. dist., mkd. with no visible marks.

A larch, 17 ins. diam., bears N 66° W, 7.3 ft. dist., mkd. 4 HES 506 BT.

A larch, 9 ins. diam., bears S 2° W, 12.5 ft. dist., mkd. 4 HES 506 BT.

- III. Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

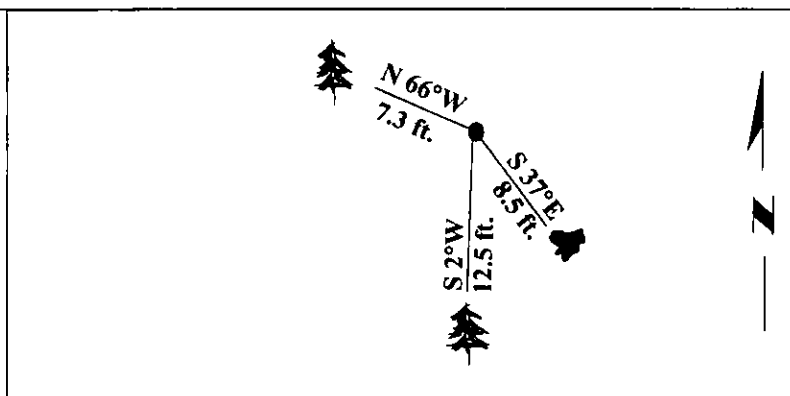

SKETCH OF CORNER

CERTIFICATION

I, Rex Owen Rice
certify the information shown herein is true and correct.

II, Ronald A. Pearson
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal

Date: 4/8/96

Reg. No.: 9008LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Apr 30, 1996 was noted on the cross-index plat and is assigned page No. 9004 in book No. _____

Coral M. Cummings By Debra Blythe
County Official

