LINCOLN COUNTY HEALTH DEPARTMENT Permit # 24-3631
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 04/23/2024 Expiration Date: 04/22/2025

Property Owner: Ron Denowth

Mailing Address: [redacted]

Installer: Tony Berget License #: 26

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of gravity wastewater system.

Legal: VICKS TRACTS, S24, T30 N, R31 W, ACRES 1, LOT 5 PLAT 439

Property Address: 27 Nugget Drive, Libby, MT 59923 Assessment Code: 3631

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of gravity system to replace unpermitted system for 2 bedroom house and bathroom in shop. Minimum 5' natural soil between trenches and maximum trench width 24". One lateral has 36" wide chambers.

# of Bedrooms: 2 +bathroom in shop Septic Tank Size: 1000gallons Trench Width: 24"

# of Laterals: 4(3 new laterals +1existing) Length of Laterals: 50' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.


Signed: _____ *Date:* _____

_____ Lincoln County Health Department (LCHD) _____ Licensed Installer w/ approval of LCHD

This permit is not finalized until the system is inspected and the closure statement is signed.
This permit is not a guarantee that the system will function properly for a prescribed period of time.

Ron Denowh

Assessment Code _____

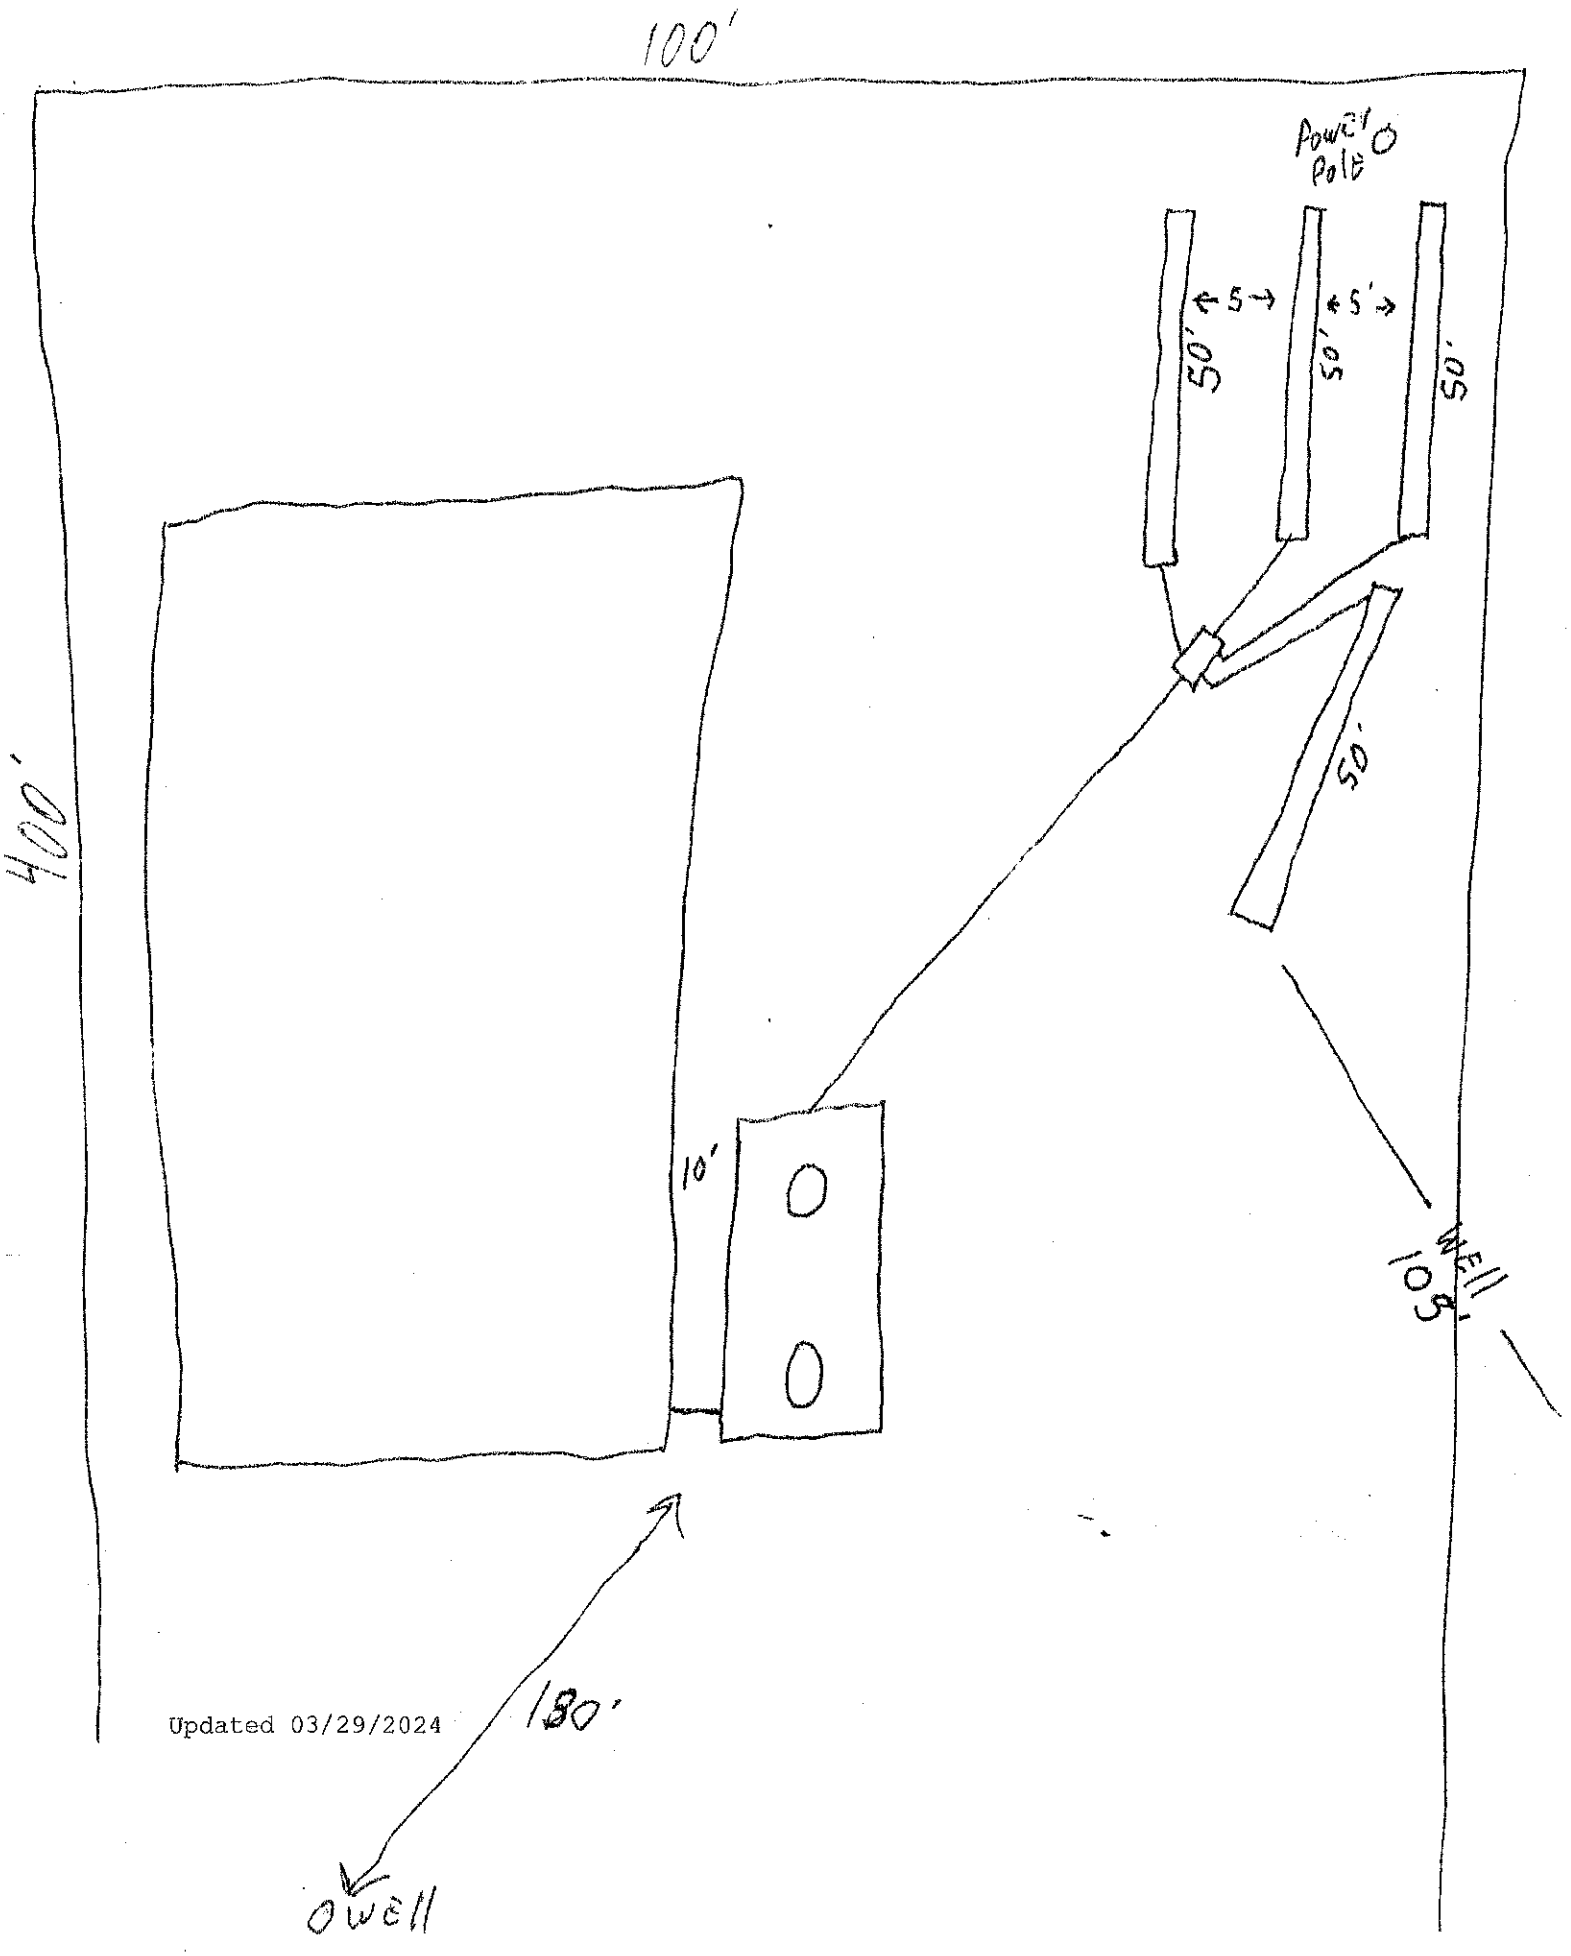

Updated 03/29/2024